



GT12025-EDLA1



GT12025-HDLA1



GT12025-BDLA1



GT12025-SDLA1

Model

Specifications

Bearing System

Operation Voltage (V DC)	7.5 ~ 13.8
Rated Voltage (V DC)	12.0
Rated Current (AMP)	0.12
Input Power (Watt)	1.44
Fan Speed (RPM)	950 ± 150
Air Volume (CFM)	35.8
Airflow (m³ / min)	1.02
Static Pressure (mmH2O)	0.75
Noise Level (dBA)	18.0
MTBF (hours / 25° C)	35000
Safety	CE, UL, TUV
Dimension (mm)	120 x 120 x 25
Total Weight (gram)	144.5
Connector Type	3 & 4 Pin Connectors

Entering Bearing

7.5 ~ 13.8
12.0
0.12
1.44
950 ± 150
35.8
1.02
0.75
18.0
35000
CE, UL, TUV
120 x 120 x 25
144.5
3 & 4 Pin Connectors

Hydrodynamic Bearing

7.5 ~ 13.8
12.0
0.12
1.44
950 ± 150
35.8
1.02
0.75
18.0
80000
CE, UL, TUV
120 x 120 x 25
146
3 & 4 Pin Connectors

2-Ball Bearing

7.5 ~ 13.8
12.0
0.12
1.44
950 ± 150
35.8
1.02
0.75
18.0
50000
CE, UL, TUV
120 x 120 x 25
143.5
3 & 4 Pin Connectors

Long-lived Sleeve Bearing


7.5 ~ 13.8
12.0
0.12
1.44
950 ± 150
35.8
1.02
0.75
18.5
25000
CE, UL, TUV
120 x 120 x 25
141.5
3 Pin Connectors

* FAN APPROVED BY CE & TUV & UL

* All rights reserved.

* The specifications are subject to change without notice.

All brand names and trademarks are the properties of their respective owners.

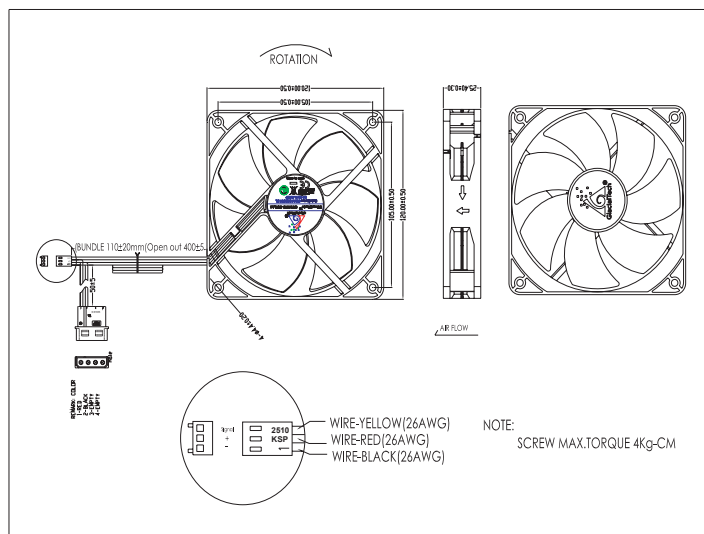

AIR FLOW - AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH2O)

