



GT8025-EDLA1



GT8025-HDLA1



GT8025-BDLA1



GT8025-SDLA1

Model

Specifications

Bearing System

Operation Voltage (V DC)

Rated Voltage (V DC)

Rated Current (AMP)

Input Power (Watt)

Fan Speed (RPM)

Air Volume (CFM)

Airflow (m³ / min)

Static Pressure (mmH2O)

Noise Level (dBA)

MTBF (hours / 25° C)

Safety

Dimension (mm)

Total Weight (gram)

Connector Type

Entering Bearing

6.0 ~ 13.8

12.0

0.10

1.2

1700 ± 10%

26.3

0.75

1.28

18

35000

CE, UL, TUV

80 x 80 x 25

74.5

3 & 4 Pin Connectors

Hydrodynamic Bearing

6.0 ~ 13.8

12.0

0.10

1.2

1700 ± 10%

26.3

0.75

1.28

18.0

80000

CE, UL, TUV

80 x 80 x 25

75.5

3 & 4 Pin Connectors

2-Ball Bearing

6.0 ~ 13.8

12.0

0.10

1.2

1700 ± 10%

26.3

0.75

1.28

18.0

50000

CE, UL, TUV

80 x 80 x 25

72.5

3 & 4 Pin Connectors

Long-lived Sleeve Bearing

6.0 ~ 13.8

12.0

0.10

1.2

1700 ± 10%

26.3

0.75

1.28

18.5


25000

CE, UL, TUV

80 x 80 x 25

70.5

3 Pin Connectors




* FAN APPROVED BY CE & TUV & UL

* All rights reserved.

* The specifications are subject to change without notice.

All brand names and trademarks are the properties of their respective owners.

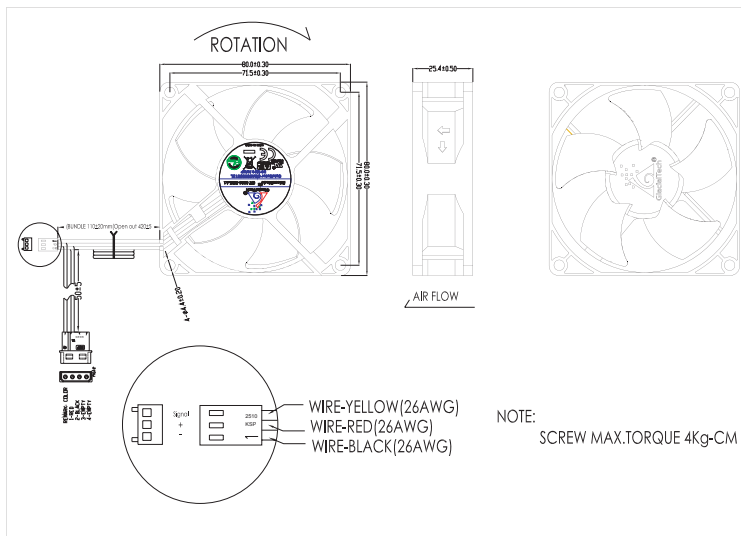

AIR FLOW - AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE (mmH2O)

