

Lighting You Always

LED Lighting Products

LED 照明 產品 目錄 2018 October



GlacialLight, the lighting division of GlacialTech, manufactures LED lighting solutions for indoor/outdoor applications and both residential and commercial uses. As well as having a wide range of finished LED lighting products, GlacialLight also offers its clients the option of customizing products for specific needs. Please visit the company homepage at www.GlacialLight.com.

值得信賴的優良 LED 照明產品

LED 照明產品的設計基於三項核心技術，包括電源設計，散熱設計和光學，分別透過洋鑫科技的三大品牌 GlacialPower、GlacialTech 和 GlacialLight 得以實現。三大核心技術在手，洋鑫科技整合所有資源所需的傑出設計製造值得信賴的優良LED 照明產品。

LED Feature Lighting /

情境吊燈

GL-BL30 / GL-BL30D	03
GL-BL50 / GL-BL50D	04
GL-CFD06DA-35	06

LED Bay Light /

工礦燈

GL-BL60 / GL-BL60DA	08
GL-BL100	09
GL-BL150	10
GL-BL190 / GL-BL190DA	11
GL-BL300	12

LED Flood Light /

泛光燈

GL-FL15 / GL-FD15	15
GL-FL15S	16
GL-FL35	17
GL-FL55	18
GL-FL100	19
GL-FL150	20
GL-FL190 / GL-FL190DA	21

LED Track Spot Light /

軌道燈

GL-TSL30	22
----------------	----

LED Wall-mounted luminaires /

戶外壁掛式燈

GL-WL1012P	22
------------------	----

LED Down Light /

直下式筒燈

GL-DLC06	24
GL-DL04	25
GL-DL06	25
GL-DL06-IP / DL06-SM	26
GL-DL08 / DL08-IP	27
GL-DL08-SM	28
GL-DL10 / DL10-SM	28

LED Feature Lighting

Commercial & Household Lighting 情境吊燈

GL-BL30 / GL-BL30D

GL-BL50 / GL-BL50D

GL-CFD06DA-35

CE FC IP65



GlacialPower LED Driver Inside.





(Frosted Cover)
(Glass Lens)

CE FC IP65 LM79

■ GL-BL30 series

High system efficacy up to 107 lm/W.

Attachment options: cable or metal pendant rod.

Frosted cover softens light and comes with lampshade or without for lower installations.

Glass lens cover available for direct lighting, suitable for higher installations.

Optional dimming available.(DA Type) (1-10V/PWM/Resistor)

高系統效能達每瓦107流明。

安裝選擇：鋼繩或金屬吊桿。

霧面燈罩提供柔和的光源照明，可搭配燈裙和無燈裙應用。

玻璃透鏡款式，適用於較高的安裝。

可選調光版本。(DA型號)

(Frosted Cover is default shipment, [Glass Lens for optional](#).)

Type/ 型號	GL-BL30	GL-BL30DA
Energy Used/ 耗電量	30W	
Rated Life/ 額定壽命	30,000 Hours	
Input Voltage/ 輸入電壓	100-240V AC (Driver with CUL Certificate Supports 277V AC for North America only)	
CCT (color)/ 色溫	3000K / 4000K / 5000K	
Luminous Flux / 光通量	Frosted	2400 lm / 2450 lm / 2550 lm
	Glass	3050 lm / 3150 lm / 3200 lm
System Efficacy/ 系統效能	Frosted	80 lm/W / 82 lm/W / 85 lm/W
	Glass	102 lm/W 105 lm/W 107 lm/W
CRI (Minimum)/ 顯色指數	80	
Beam Angle/ 光束角	Frosted	90° (with lampshade)
	Glass	70° (with lampshade)
Dimension/ 尺寸	Ø 305 x 300 mm	
IP Rating/ IP防護等級	IP65	
Operation Temperature/ 工作溫度	-20°C ~ +40°C	
Net Weight/ 淨重	Frosted	2.1kg (with driver & lampshade)
	Glass	2.2kg (with driver & lampshade)

Frosted Cover with lampshade / 3000K

1.0M	1931 Lx	188 cm
2.0M	399 Lx	376 cm
3.0M	166 Lx	564 cm
4.0M	91 Lx	752 cm
5.0M	57 Lx	940 cm
Height	E Max.	Diameter

Frosted Cover with lampshade / 4000K

1.0M	1985 Lx	189 cm
2.0M	406 Lx	379 cm
3.0M	170 Lx	569 cm
4.0M	92 Lx	759 cm
5.0M	59 Lx	948 cm
Height	E Max.	Diameter

Frosted Cover with lampshade / 5000K

1.0M	2027 Lx	188 cm
2.0M	417 Lx	376 cm
3.0M	174 Lx	564 cm
4.0M	95 Lx	752 cm
5.0M	60 Lx	940 cm
Height	E Max.	Diameter



(Frosted Cover)
(Glass Lens)

■ GL-BL50 series

Translucent blue trim glows when light turns on.
Attachment options: pendant rod and cables.
Frosted lighting cover provides for smoother illumination.
Included LED driver is IP67 and UL certified.
Dimmable models available.(DA Type) (1-10V/PWM/Resistor)

燈亮起時呈現半透明藍色光環。
安裝選項：吊桿或鋼繩。
霧面燈罩提供柔和的光源照明。
IP67和UL認證的LED驅動器。
可選調光版本。(DA型號)



CE FCC IP65 LM79

(Frosted Cover is default shipment, [Glass Lens for optional.](#))

Type/ 型號	GL-BL50		GL-BL50DA	
Energy Used/ 耗電量	47.5W			
Rated Life/ 額定壽命	30,000 Hours			
Input Voltage/ 輸入電壓	100-240V AC (Driver with CUL Certificate Supports 277V AC for North America only)			
CCT (color)/ 色溫	3000K / 4000K / 5000K			
Luminous Flux / 光通量	Frosted	4100 lm / 4200 lm / 4300 lm		
	Glass	5150 lm / 5500 lm / 5600 lm		
System Efficacy/ 系統效能	Frosted	86 lm/W / 88 lm/W / 91 lm/W		
	Glass	108 lm/W / 116 lm/W / 118 lm/W		
CRI (Minimum)/ 顯色指數	80			
Beam Angle/ 光束角	Frosted	90° (with lampshade)		
	Glass	70° (with lampshade)		
Dimension/ 尺寸	Ø 305 x 300 mm			
IP Rating/ IP防護等級	IP65			
Operation Temperature/ 工作溫度	-20°C ~ +40°C			
Net Weight/ 淨重	Frosted	2.1kg (with driver & lampshade)		
	Glass	2.2kg (with driver & lampshade)		

Frosted Cover with lampshade / 3000K

1.0M	2971 Lx	196 cm
2.0M	617 Lx	393 cm
3.0M	261 Lx	589 cm
4.0M	143 Lx	786 cm
5.0M	90 Lx	982 cm
Height	E Max.	Diameter

Frosted Cover with lampshade / 4000K

1.0M	3108 Lx	196 cm
2.0M	640 Lx	393 cm
3.0M	272 Lx	589 cm
4.0M	148 Lx	786 cm
5.0M	94 Lx	982 cm
Height	E Max.	Diameter

Frosted Cover with lampshade / 5000K

1.0M	3252 Lx	191 cm
2.0M	676 Lx	382 cm
3.0M	288 Lx	574 cm
4.0M	157 Lx	765 cm
5.0M	100 Lx	957 cm
Height	E Max.	Diameter

LED Feature Lighting


GL-CFD06DA-35
GL-CFD06DA-35C



GlacialPower LED Driver Inside.

CE FC IP20 LM79



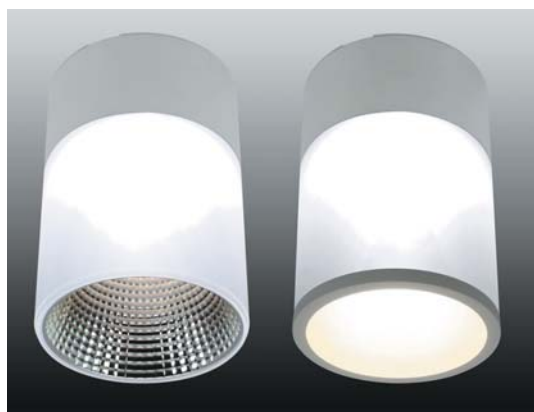

Reflector

frosted reinforced

■ GL-BL50 series

High system efficacy, up to 102 lm/W.

3-in-1 Dimmable (1-10 V, PWM, or Resistor).

30 W main light with choice of 3000K, 4000K, or 5000K color temperature.

5 W sub light strip and optional color ring in red, green, blue, purple or yellow.

Installation accessory options: Standard surface mounted, or suspension option.

Aluminum outer ring and frosted reinforced glass to prevent direct light being too sharp.



Optional Color Ring : Red/Yellow/Green/Blue/Purple

Type	GL-CFD06DA-35 (Reflector)	GL-CFD06DA-35C (frosted reinforced glass)
Energy Used (Main+Sub light)	35W	
Rated Life	30,000 Hours	
Input Voltage	100-240V AC (Driver with CUL Certificate Supports 277V AC for North America only)	
Dimming Control (3 in 1)	1-10V, 10V PWM, Resistance/Potentiometer	
Color Ring	6000K (default); Red, Green, Blue, Purple, Yellow (optional)	
Energy Used (Main light CoB)	30W	
CCT (color)	3000K / 4000K / 5000K	
Luminous Flux	Reflector	2800 lm / 3050 lm / 3050 lm
	frosted reinforced	2250 lm / 2450 lm / 2450 lm
System Efficacy	Reflector	93 lm/W / 102 lm/W / 102 lm/W
	frosted reinforced	75 lm/W / 82 lm/W / 82 lm/W
CRI (Minimum)	80	
Beam Angle	40° (Reflector) / 45° (frosted reinforced glass)	
Dimension	Ø 150 x 220 mm	
Operation Temperature	-20°C ~ +40°C	
Net Weight	1.7kg (Reflector) / 1.9 kg (frosted reinforced glass)	

40° / 3000K

1.0M	8865 Lx	69 cm
2.0M	1814 Lx	139 cm
3.0M	751 Lx	209 cm
4.0M	408 Lx	279 cm
5.0M	255 Lx	349 cm
Height	E Max.	Diameter

40° / 4000K

1.0M	9750 Lx	70 cm
2.0M	1990 Lx	141 cm
3.0M	825 Lx	212 cm
4.0M	448 Lx	283 cm
5.0M	279 Lx	354 cm
Height	E Max.	Diameter

40° / 5000K

1.0M	9780 Lx	72 cm
2.0M	1982 Lx	145 cm
3.0M	819 Lx	218 cm
4.0M	445 Lx	291 cm
5.0M	277 Lx	363 cm
Height	E Max.	Diameter

LED Bay Light

High Performance Indoor and Outdoor Lighting 工礦燈

GL-BL60 / GL-BL60DA

GL-BL100

GL-BL150

GL-BL190 / GL-BL190DA

GL-BL300

CE FC IP66



GlacialPower®

GlacialPower LED Driver Inside.

■ GL-BL60 series



CE FCC IP66 LM79

-40°C Test Approved

GL-BL60 gimbal mount Bay Light to be adjusted 360° horizontally or 180° vertically.

High system efficacy up to 116 lm/W.

GL-BL60 can be mounted to a ceiling, on a wall or ground surfaces, and suspended with a chain.

It can operate at ambient temperatures from -40°C ~ +50°C.

Optional dimming available. (DA Type)(1-10V/PWM/Resistor)

GL-BL60可旋轉工礦燈，支架具有360度水平軸旋轉和180度燈具垂直旋轉的功能。

高系統效能達每瓦116流明。

可吸頂方式安裝在天花板上，鎖在牆壁或地面上，和搭配吊鍊懸吊方式。

可於環境溫度介於負40°C至正50°C之間操作。

可選調光版本。(DA型號)



Type/ 型號	GL-BL60	GL-BL60DA
Energy Used/ 耗電量	54W	
Rated Life/ 額定壽命	30,000 Hours	
Input Voltage/ 輸入電壓	100-240V AC (Driver with CUL Certificate Supports 277V AC for North America only)	
CCT (color)/ 色溫	3000K / 4000K / 5000K	
Luminous Flux / 光通量	5900 lm / 6150 lm / 6250 lm	
System Efficacy/ 系統效能	109 lm/W / 114 lm/W / 116 lm/W	
CRI (Minimum)/ 顯色指數	80	
Beam Angle/ 光束角	70° / 120° (with lampshade)	
Dimension/ 尺寸	Adjustable height Ø197 x 192 mm ~ Ø197 x 252 mm	
IP Rating/ IP防護等級	IP66	
Operation Temperature/ 工作溫度	-40°C ~ +50°C	
Net Weight/ 淨重	2.0 kg (with driver & lampshade)	

70°/3000K

1.0M	7220 Lx	133 cm
2.0M	1609 Lx	267 cm
3.0M	688 Lx	400 cm
4.0M	380 Lx	534 cm
5.0M	240 Lx	668 cm
Height	E Max.	Diameter

70°/4000K

1.0M	7450 Lx	134 cm
2.0M	1658 Lx	269 cm
3.0M	710 Lx	404 cm
4.0M	393 Lx	539 cm
5.0M	247 Lx	674 cm
Height	E Max.	Diameter

70°/5000K

1.0M	7525 Lx	134 cm
2.0M	1660 Lx	269 cm
3.0M	703 Lx	404 cm
4.0M	393 Lx	539 cm
5.0M	249 Lx	674 cm
Height	E Max.	Diameter

■ GL-BL100 series



CE FCC IP66 LM79
-40°C Test Approved

High system efficacy up to 113 lm/W.
10,000 lumen output for high bay lighting and outdoor lighting.
70° Lens standard for spot lighting.
120° Lens available for flood lighting and area illumination.
Lampshades available for 60° and 120°. (optional accessory)
Outdoor-ready rotating mounting bracket available. (optional accessory)
With Unified Glare Rating (UGR) under 19.
Lux enhancer focuses the light output to narrow beam angle to light longer distance. (optional accessory)

高系統效能達每瓦113流明適合取代金屬鹵化物燈。
輸出高達1萬流明值以上。
標準品70度光束角適用於投射燈應用。
提供120度光束角選擇，適用於泛光燈和區域照明應用。
提供選配60度和120度燈罩。(可選配件)
提供支架安裝可應用於戶外投射照明。(可選配件)
照度增強器可以將出光的角度縮小，將光聚焦投射至更遠的地方，加強中心的照度。(可選配件)



Type/ 型號	GL-BL100		
Energy Used/ 耗電量	96W		
Rated Life / 額定壽命	30,000 Hours		
Input Voltage/ 輸入電壓	100-240V AC (Driver with CUL Certificate Supports 277V AC for North America only)		
CCT (color)/ 色溫	3000K / 4000K / 5000K		
Luminous Flux / 光通量	70°	10000 lm / 10500 lm / 10700 lm	
	120°	10000 lm / 10700 lm / 10800 lm	
System Efficacy/ 系統效能	70°	104 lm/W / 109 lm/W / 111 lm/W	
	120°	104 lm/W / 111 lm/W / 113 lm/W	
CRI (Minimum)/ 顯色指數	80		
Beam Angle/ 光束角	70° / 120°		
Dimension/ 尺寸	Ø 280 x 242 mm (70°) / Ø 280 x 230 mm (120°)		
IP Rating/ IP防護等級	IP66		
Operation Temperature/ 工作溫度	-40°C ~ +50°C (Support for 200~240V AC) -20°C ~ +50°C (Support for 100~120V AC)		
Net Weight/ 淨重	3.1 kg (without lampshade)		

70°/3000K

1.0M	13340 Lx	133 cm
2.0M	2797 Lx	267 cm
3.0M	1177 Lx	400 cm
4.0M	646 Lx	534 cm
5.0M	404 Lx	668 cm
Height	E Max.	Diameter

70°/4000K

1.0M	13739 Lx	136 cm
2.0M	2873 Lx	272 cm
3.0M	1212 Lx	408 cm
4.0M	661 Lx	544 cm
5.0M	418 Lx	680 cm
Height	E Max.	Diameter

70°/5000K

1.0M	14046 Lx	133 cm
2.0M	2925 Lx	267 cm
3.0M	1239 Lx	400 cm
4.0M	674 Lx	534 cm
5.0M	425 Lx	668 cm
Height	E Max.	Diameter



CE FC IP66 LM79
-40°C Test Approved

■ GL-BL150 series

High system efficacy up to 111 lm/W.

16,300 lumen output for high bay lighting and outdoor lighting.

60° Lens standard for bay lighting.

120° Lens available for flood lighting and area illumination.

Lampshades available for 60 degree and 120 degree. (optional accessory)

Outdoor-ready rotating mounting bracket available. (optional accessory)

Lux enhancer focuses the light output to narrow beam angle to light longer distance. (optional accessory)

高系統效能達每瓦111流明。

16300流明輸出適用於投射燈和戶外燈照明。

60度光束角適用於投射燈。

120度光束角選擇，適用於泛光燈和區域照明應用。

提供60度和120度燈罩。(可選配件)

提供支架安裝可應用於戶外投射照明。(可選配件)

照度增強器可以將出光的角度縮小，將光聚焦投射至更遠的地方，加強中心的照度。(可選配件)



Type/ 型號	GL-BL150		
Energy Used/ 耗電量	147W		
Rated Life/ 額定壽命	30,000 Hours		
Input Voltage/ 輸入電壓	100-240V AC		
CCT (color)/ 色溫	3000K / 4000K / 5000K		
Luminous Flux / 光通量	60°	14700 lm / 15800 lm / 16200 lm	
	120°	14800 lm / 15900 lm / 16300 lm	
System Efficacy/ 系統效能	60°	100 lm/W / 107 lm/W / 110 lm/W	
	120°	101 lm/W / 108 lm/W / 111 lm/W	
CRI (Minimum)/ 顯色指數	80		
Beam Angle/ 光束角	60° / 120°		
Dimension/ 尺寸	Ø 280 x 280 mm (60°) / Ø 280 x 268 mm (120°)		
IP Rating/ IP防護等級	IP66		
Operation Temperature/ 工作溫度	-40°C ~ +50°C		
Net Weight/ 淨重	3.6 kg (without lampshade)		

60°/ 3000K

1.0M	18861 Lx	117 cm
2.0M	4451 Lx	235 cm
3.0M	1941 Lx	353 cm
4.0M	1079 Lx	471 cm
5.0M	682 Lx	589 cm
Height	E Max.	Diameter

60°/ 4000K

1.0M	20853 Lx	117 cm
2.0M	4890 Lx	235 cm
3.0M	2135 Lx	353 cm
4.0M	1188 Lx	471 cm
5.0M	758 Lx	589 cm
Height	E Max.	Diameter

60°/ 5000K

1.0M	21080 Lx	117 cm
2.0M	4944 Lx	235 cm
3.0M	2152 Lx	353 cm
4.0M	1197 Lx	471 cm
5.0M	766 Lx	589 cm
Height	E Max.	Diameter

■ GL-BL190 series



CE FC IP66 LM79
-40°C Test Approved

High system efficacy up to 124 lm/W.
23,000 lumen output for high bay lighting and outdoor lighting.
3-in-1 dimming function available (DA Type).
70 degree lens and 120 degree lens are available.
High bay model features dual cable design for added safety.
Lampshades available for 60 degree and 120 degree. (optional accessory)
Outdoor-ready rotating mounting bracket available. (optional accessory)
Lux Enhancer increases 80% Lux with tighter beam angle and increased throw. (optional accessory)

高系統效能達每瓦124流明適合取代金屬鹵化物燈。
輸出高達23000流明值。

提供三合一調光功能。(DA型號)

提供70度和120度光束角選擇。

採用雙纜繩設計，增加安全性。

提供選配60度和120度燈罩。(可選配件)

提供支架安裝可應用於戶外投射照明。(可選配件)

照度增強器能使光束角度縮小，將光投射至更遠的地方並增加80%照度。(可選配件)



Type/ 型號	GL-BL190	GL-BL190DA
Energy Used/ 耗電量	185W	
Rated Life/ 額定壽命	30,000 Hours	
Input Voltage/ 輸入電壓	100-240V AC Support 277V AC for North America only *(Note 1)	
CCT (color)/ 色溫	3000K / 4000K / 5000K	
Luminous Flux / 光通量	21400 lm / 22200 lm / 23000 lm	
System Efficacy/ 系統效能	116 lm/W / 120 lm/W / 124 lm/W	
CRI (Minimum)/ 顯色指數	80	
Beam Angle/ 光束角	70° / 120°	
Dimension/ 尺寸	267 x Ø 210 x 350 mm	
IP Rating/ IP防護等級	IP66	
Operation Temperature/ 工作溫度	-40°C ~ +50°C (-40°C ~ -20°C; Support for 200-240V AC Input Voltage)	
Net Weight/ 淨重	3.9 kg (without lampshade)	4 kg (without lampshade)
*Note 1: Input Voltage Range (90-295V AC)		

70°/3000K

1.0M	20660 Lx	142 cm
2.0M	4970 Lx	285 cm
3.0M	2177 Lx	427 cm
4.0M	1215 Lx	570 cm
5.0M	772 Lx	713 cm
Height	E Max.	Diameter

70°/4000K

1.0M	21282 Lx	142 cm
2.0M	5083 Lx	285 cm
3.0M	2234 Lx	427 cm
4.0M	1241 Lx	570 cm
5.0M	791 Lx	713 cm
Height	E Max.	Diameter

70°/5000K

1.0M	22443 Lx	143 cm
2.0M	5226 Lx	287 cm
3.0M	2260 Lx	431 cm
4.0M	1263 Lx	575 cm
5.0M	806 Lx	719 cm
Height	E Max.	Diameter



IP66

■ GL-BL300 series

High system efficacy up to 110 lm/W.
 34,500 lumen output for high bay lighting.
 70 degree lens and 120 degree lens are available.
 Lampshades available for 60 degree and 120 degree. (optional accessory)
 Outdoor-ready 180 degree rotating stainless steel mounting bracket. (optional accessory)
 IP67 waterproof connectors available. (optional accessory)
 Lux Enhancer increases 83% Lux with tighter beam angle and increased throw. (optional accessory)

高系統效能達每瓦110流明。
 34500流明輸出適用於投射燈和戶外燈照明。
 70度和120度光束角可供選擇。
 提供60度和120度燈罩。(可選配件)
 180度旋轉不銹鋼安裝支架可應用於戶外投射照明。(可選配件)
 IP67防水連接器。(可選配件)
 照度增強器能使光束角度縮小，將光投射至更遠的地方並增加83%照度。(可選配件)



Type/ 型號	GL-BL300-CW
Energy Used/ 耗電量	315W
Rated Life/ 額定壽命	30,000 Hours
Input Voltage/ 輸入電壓	100-240V AC (Driver with cUL Certificate Support 277V AC for North America only)
CCT (color)/ 色溫	3000K / 4000K / 5000K
Luminous Flux / 光通量	34000 lm / 34500 lm / 34500 lm
System Efficacy/ 系統效能	108 lm/W / 110 lm/W / 110 lm/W
CRI (Minimum)/ 顯色指數	80
Beam Angle/ 光束角	70° / 120°
Dimension/ 尺寸	300 x Ø300 x 341 mm
IP Rating/ IP防護等級	IP66
Operation Temperature/ 工作溫度	-20°C ~ +50°C
Net Weight/ 淨重	8 kg (Without Lampshade)

70°/3000K

1.0M	37825 Lx	138 cm
2.0M	8781 Lx	275 cm
3.0M	3832 Lx	412 cm
4.0M	2129 Lx	550 cm
5.0M	1351 Lx	687 cm
Height	E Max.	Diameter

70°/4000K

1.0M	38177 Lx	140 cm
2.0M	8931 Lx	280 cm
3.0M	3881 Lx	420 cm
4.0M	2161 Lx	560 cm
5.0M	1373 Lx	700 cm
Height	E Max.	Diameter

70°/5000K

1.0M	38177 Lx	140 cm
2.0M	8931 Lx	280 cm
3.0M	3881 Lx	420 cm
4.0M	2161 Lx	560 cm
5.0M	1373 Lx	700 cm
Height	E Max.	Diameter



High Bay Light with LUX Enhancer (Tulip II)



High Bay Light with LUX Enhancer (Tulip I)

LED Flood Light

Highly Efficient 15W ~ 190W Outdoor Flood Lights 泛光燈

GL-FL15 / GL-FD15
GL-FL15S
GL-FL35
GL-FL55
GL-FL100
GL-FL150
GL-FL190 / FL190DA



CE FC IP66



GlacialPower®

GlacialPower LED Driver Inside.

■ GL-FL15 series



CE FC IP66 LM79
-40°C Test Approved

High system efficacy up to 115 lm/W.
Stainless steel outdoor-ready mounting bracket features 360 degrees of adjustment vertically.
Corrosion-resistant aluminum Outdoor Stake Light Bracket.
60 degree beam angle available, 40 and 120 degree beam angle are optional.
IP66 rated rugged for outdoor use.
Wide operating temperature range from -40°C to +50°C.

高系統效能達每瓦115流明。
不銹鋼戶外安裝支架可360度旋轉調整。
耐腐蝕鋁壓鑄戶外插地拔支架。
標準60度光束角，另提供40度和120度可選。
IP66防護等級設計。
廣泛工作溫度範圍，從-40°C 至 +50°C。



Type/ 型號	GL-FL15	GL-FD15
Energy Used/ 耗電量	15W	
Rated Life/ 額定壽命	30,000 Hours	
Input Voltage/ 輸入電壓	100-240V AC	11-15V DC / 22-30V DC
CCT (color)/ 色溫	3000K / 4000K / 5000K	
Luminous Flux/ 光通量	1570 lm / 1650 lm / 1730 lm	
System Efficacy/ 系統效能	105 lm/W / 110 lm/W / 115 lm/W	
CRI (Minimum)/ 顯色指數	80	
Beam Angle/ 光束角	40° / 60° / 120°	
Dimension/ 尺寸	125 x 125 x 88.4 mm	
IP Rating/ IP防護等級	IP66	
Operation Temperature/ 工作溫度	-40°C ~ +50°C	
Net Weight/ 淨重	1.2 kg (GL-FL15) / 950 g (GL-FD15)	

60°/3000K

1.0M	2600 Lx	101 cm
2.0M	575 Lx	203 cm
3.0M	246 Lx	305 cm
4.0M	135 Lx	407 cm
5.0M	86 Lx	509 cm
Height	E Max.	Diameter

60°/4000K

1.0M	2602 Lx	104 cm
2.0M	571 Lx	208 cm
3.0M	244 Lx	312 cm
4.0M	134 Lx	416 cm
5.0M	85 Lx	520 cm
Height	E Max.	Diameter

60°/5000K

1.0M	2775 Lx	104 cm
2.0M	604 Lx	208 cm
3.0M	259 Lx	312 cm
4.0M	145 Lx	416 cm
5.0M	90 Lx	520 cm
Height	E Max.	Diameter



CE FC IP54

■ GL-FL15S series

High system efficacy up to 108 lm/W.

An optional PIR sensor detects motion over a 180° field of view.

Stainless steel outdoor-ready mounting bracket features 360° of adjustment vertically.

60° beam angle available, 40° and 120° beam angle are optional

The lighting fixture can be installed outdoor (roof), corridors or under the shelter.

Wide operating temperature range from -20°C to +40°C

高系統效能達每瓦108流明。

紅外線感應器 (PIR) 可偵測到180度視線範圍的動作。

不銹鋼戶外安裝支架可360度旋轉調整。

標準60度光束角，另提供40度和120度可選。

IP54防護等級設計。

廣泛工作溫度範圍，從-20°C 至 +40°C。



Type/ 型號	GL-FL15S
Energy Used/ 耗電量	16W
Rated Life/ 額定壽命	30,000 Hours
Input Voltage/ 輸入電壓	100-240V AC
CCT (color)/ 色溫	3000K / 4000K / 5000K
Luminous Flux / 光通量	1570 lm / 1650 lm / 1730 lm
System Efficacy/ 系統效能	98 lm/W / 103 lm/W / 108 lm/W
CRI (Minimum)/ 顯色指數	80
Beam Angle/ 光束角	40° / 60° / 120°
Dimension/ 尺寸	125 x 173 x 110 mm
IP Rating/ IP防護等級	IP54
Operation Temperature/ 工作溫度	-20°C ~ +40°C
Net Weight/ 淨重	1.3 kg

60°/3000K

1.0M	2600 Lx	101 cm
2.0M	575 Lx	203 cm
3.0M	246 Lx	305 cm
4.0M	135 Lx	407 cm
5.0M	86 Lx	509 cm
Height	E Max.	Diameter

60°/4000K

1.0M	2602 Lx	104 cm
2.0M	571 Lx	208 cm
3.0M	244 Lx	312 cm
4.0M	134 Lx	416 cm
5.0M	85 Lx	520 cm
Height	E Max.	Diameter

60°/5000K

1.0M	2775 Lx	104 cm
2.0M	604 Lx	208 cm
3.0M	259 Lx	312 cm
4.0M	145 Lx	416 cm
5.0M	90 Lx	520 cm
Height	E Max.	Diameter

■ GL-FL35 series



CE FC IP66 LM79
-40°C Test Approved

High system efficacy up to 108 lm/W.
Stainless steel outdoor-ready mounting bracket features 360° of adjustment vertically.
Corrosion-resistant aluminum Outdoor Stake Light Bracket.
60° beam angle available, 40° and 120° beam angle are optional.
IP66 rated rugged for outdoor use.
Wide operating temperature range from -40°C to +45°C.

高系統效能達每瓦108流明。
不銹鋼戶外安裝支架可360度旋轉調整。
耐腐蝕鋁壓鑄戶外插地拔支架。
標準60度光束角，另提供40度和120度可選。
IP66防護等級設計。
廣泛工作溫度範圍，從-40°C 至 +45°C。



Type/ 型號	GL-FL35
Energy Used/ 耗电量	35W
Rated Life/ 额定寿命	30,000 Hours
Input Voltage/ 输入电压	100-240V AC
CCT (color)/ 颜色	3000K / 4000K / 5000K
Luminous Flux / 光通量	3490 lm / 3680 lm / 3780 lm
System Efficacy/ 系统效能	100 lm/W / 105 lm/W / 108 lm/W
CRI (Minimum)/ 显色指数	80
Beam Angle/ 光束角	40° / 60° / 120°
Dimension/ 尺寸	125 x 125 x 88.4 mm
IP Rating/ IP防护等级	IP66
Operation Temperature/ 工作温度	-40°C ~ +45°C (GL-FL35 can operate in temperatures as low as -40°C.)
Net Weight/ 净重	1.4 kg

60°/ 3000K

1.0M	5468 Lx	106 cm
2.0M	1218 Lx	212 cm
3.0M	513 Lx	319 cm
4.0M	282 Lx	425 cm
5.0M	177 Lx	531 cm
Height	E Max.	Diameter

60°/ 4000K

1.0M	5697 Lx	106 cm
2.0M	1259 Lx	212 cm
3.0M	535 Lx	319 cm
4.0M	293 Lx	425 cm
5.0M	187 Lx	531 cm
Height	E Max.	Diameter

60°/ 5000K

1.0M	5787 Lx	108 cm
2.0M	1274 Lx	217 cm
3.0M	539 Lx	325 cm
4.0M	297 Lx	434 cm
5.0M	188 Lx	542 cm
Height	E Max.	Diameter



CE FCC IP66 LM79

■ GL-FL55 series

High system efficacy up to 120 lm/W.
Stainless Steel Outdoor-ready mounting bracket features 360° of adjustment vertically.
60° and 120° beam angle available.
IP66 rated rugged for outdoor use.
Wide operating temperature range from -40°C to +50°C.

高系統效能達每瓦120流明。
不銹鋼戶外安裝支架可360度旋轉調整。
60度和120度光束角可選。
IP66防護等級設計。
工作溫度範圍廣，從-40°C 至 +50°C。



Type/ 型號	GL-FL55
Energy Used/ 耗电量	55W
Rated Life/ 额定寿命	30,000 Hours
Input Voltage/ 输入电压	100-240V AC
CCT (color)/ 颜色	3000K / 4000K / 5000K
Luminous Flux / 光通量	5900 lm / 6250 lm / 6600 lm
System Efficacy/ 系统效能	107 lm/W / 114 lm/W / 120 lm/W
CRI (Minimum)/ 显色指数	80
Beam Angle/ 光束角	60° / 120°
Dimension/ 尺寸	246 x 160 x 220 mm
IP Rating/ IP防护等级	IP66
Operation Temperature/ 工作温度	-40°C ~ +50°C (Support for 200~240V AC) -20°C ~ +50°C (Support for 100~120V AC)
Net Weight/ 净重	3 kg

60°/3000K

1.0M	9832 Lx	114 cm
2.0M	2128 Lx	228 cm
3.0M	897 Lx	342 cm
4.0M	499 Lx	457 cm
5.0M	314 Lx	571 cm
Height	E Max.	Diameter

60°/4000K

1.0M	9933 Lx	115 cm
2.0M	2142 Lx	230 cm
3.0M	907 Lx	346 cm
4.0M	503 Lx	461 cm
5.0M	314 Lx	577 cm
Height	E Max.	Diameter

60°/5000K

1.0M	10044 Lx	117 cm
2.0M	2271 Lx	233 cm
3.0M	985 Lx	350 cm
4.0M	540 Lx	467 cm
5.0M	345 Lx	583 cm
Height	E Max.	Diameter



CE FC IP66 LM79
-40°C Test Approved

■ GL-FL100 series

High system efficacy up to 111 lm/W.

Stainless Steel Outdoor-ready Mount features 360° of vertical adjustment.

10,000 lumen output for powerful outdoor lighting.

70° and 120° beam angle.

IP66 rated rugged for outdoor use with waterproof power connector.

Wide operating temperature range from -40°C to +50°C.

高系統效能達每瓦111流明適合取代金屬鹵化物燈。

不銹鋼戶外安裝支架可360度調整角度。

輸出高達10,000流明值以上適用於戶外照明。

70度與120度光束角。

IP66防護等級並擁有防水電源接頭。

工作環境溫度範圍於 -40°C至 +50°C。



Type/ 型號	GL-FL100
Energy Used/ 耗電量	96W
Rated Life/ 額定壽命	30,000 Hours
Input Voltage/ 輸入電壓	100-240V AC (Driver with CUL Certificate Support 277V AC for North America only)
CCT (color)/ 色溫	3000K / 4000K / 5000K
Luminous Flux / 光通量	10000 lm / 10500 lm / 10700 lm
System Efficacy/ 系統效能	104 lm/W / 109 lm/W / 111 lm/W
CRI (Minimum)/ 顯色指數	80
Beam Angle/ 光束角	70° / 120°
Dimension/ 尺寸	283 x 160 x 248 mm
IP Rating/ IP防護等級	IP66
Operation Temperature/ 工作溫度	-40°C ~ +50°C (Support for 200~240V AC) -20°C ~ +50°C (Support for 100~120V AC)
Net Weight/ 淨重	4 kg

70°/3000K

1.0M	10605 Lx	133 cm
2.0M	2223 Lx	267 cm
3.0M	936 Lx	400 cm
4.0M	378 Lx	534 cm
5.0M	321 Lx	668 cm
Height	E Max.	Diameter

70°/4000K

1.0M	10648 Lx	133 cm
2.0M	2542 Lx	267 cm
3.0M	1112 Lx	400 cm
4.0M	621 Lx	534 cm
5.0M	395 Lx	668 cm
Height	E Max.	Diameter

70°/5000K

1.0M	10807 Lx	134 cm
2.0M	2568 Lx	269 cm
3.0M	1131 Lx	404 cm
4.0M	629 Lx	539 cm
5.0M	400 Lx	674 cm
Height	E Max.	Diameter



CE FC IP66 LM79
-40°C Test Approved

■ GL-FL150 series

High system efficacy up to 111 lm/W.
Stainless steel outdoor-ready mounting bracket features 360° of adjustment vertically.
Corrosion-resistant aluminum Outdoor Stake Light Bracket.
60° and 120° beam angle available.
IP66 rated rugged for outdoor use.
Wide operating temperature range from -40°C to +50°C.

高系統效能達每瓦111流明。
不銹鋼戶外安裝支架可360度垂直旋轉調整。
耐腐蝕鋁壓鑄戶外插地拔支架。
60度和120度光束角可選。
IP66防護等級設計。
廣泛工作溫度範圍，從-40°C 至 +50°C。



Type/ 型號	GL-FL150		
Energy Used/ 耗電量	147W		
Rated Life/ 額定壽命	30,000 Hours		
Input Voltage/ 輸入電壓	100-240V AC		
CCT (color)/ 色溫	3000K / 4000K / 5000K		
Luminous Flux / 光通量	60°/80°	14700 lm / 15800 lm / 16200 lm	
	120°	14800 lm / 15900 lm / 16300 lm	
System Efficacy/ 系統效能	60°/80°	100 lm/W / 107 lm/W / 110 lm/W	
	120°	101 lm/W / 108 lm/W / 111 lm/W	
CRI (Minimum)/ 顯色指數	80		
Beam Angle/ 光束角	60°/ 80° / 120°		
Dimension/ 尺寸	286 x 229 x 248 mm		
IP Rating/ IP防護等級	IP66		
Operation Temperature/ 工作溫度	-40°C ~ +50°C (Support for 200~240V AC) -20°C ~ +50°C (Support for 100~120V AC)		
Net Weight/ 淨重	5.25 kg		

60°/3000K

1.0M	23591 Lx	115 cm
2.0M	5066 Lx	230 cm
3.0M	2141 Lx	346 cm
4.0M	1176 Lx	461 cm
5.0M	738 Lx	577 cm
Height	E Max.	Diameter

60°/4000K

1.0M	25371 Lx	115 cm
2.0M	5356 Lx	230 cm
3.0M	2274 Lx	346 cm
4.0M	1253 Lx	461 cm
5.0M	793 Lx	577 cm
Height	E Max.	Diameter

60°/5000K

1.0M	25524 Lx	115 cm
2.0M	5555 Lx	230 cm
3.0M	2334 Lx	346 cm
4.0M	1296 Lx	461 cm
5.0M	812 Lx	577 cm
Height	E Max.	Diameter



IP66

■ GL-FL190 series

High system efficacy up to 124 lm/W.
23,000 lumen output for flood lighting.
IP66 rated rugged for outdoor use.
3-in-1 dimming functions available (DA Type).
70 degree lens and 120 degree lens are available.
Outdoor-ready 360 degree rotating stainless steel mounting bracket.
Corrosion-resistant aluminum outdoor stake light bracket available.

系統效率高達124 流明/瓦。
輸出高達23,000流明適用於泛光照明。
IP66等級堅固耐用，適合戶外使用。
提供三合一調光功能。(DA型號)
70度和120度光束角可選擇。
不銹鋼戶外安裝支架可360度旋轉調整。
耐腐蝕鋁壓鑄戶外插地拔支架。



Type/ 型號	GL-FL190	GL-FL190DA
Energy Used/ 耗電量	185W	
Rated Life/ 額定壽命	30,000 Hours	
Input Voltage/ 輸入電壓	100-240V AC Support 277V AC for North America only *(Note 1)	
CCT (color)/ 色溫	3000K / 4000K / 5000K	
Luminous Flux / 光通量	21400 lm / 22200 lm / 23000 lm	
System Efficacy/ 系統效能	116 lm/W / 120 lm/W / 124 lm/W	
CRI (Minimum)/ 顯色指數	80	
Beam Angle/ 光束角	70° / 120° (Without Lampshade)	
Dimension/ 尺寸	Adjustable height L 320 x W 200 x H 290 ~ 355 mm (With Lampshade)	
IP Rating/ IP防護等級	IP66	
Operation Temperature/ 工作溫度	-40°C ~ +50°C (-40°C ~ -20°C; Support for 200-240V AC Input Voltage)	
Net Weight/ 淨重	6.4 kg (With Lampshade)	
*Note 1: Input Voltage Range (90-295V AC)		

70°/3000K

1.0M	20660 Lx	142 cm
2.0M	4970 Lx	285 cm
3.0M	2177 Lx	427 cm
4.0M	1215 Lx	570 cm
5.0M	772 Lx	713 cm
Height	E Max.	Diameter

70°/4000K

1.0M	21282 Lx	142 cm
2.0M	5083 Lx	285 cm
3.0M	2234 Lx	427 cm
4.0M	1241 Lx	570 cm
5.0M	791 Lx	713 cm
Height	E Max.	Diameter

70°/5000K

1.0M	22443 Lx	143 cm
2.0M	5226 Lx	287 cm
3.0M	2260 Lx	431 cm
4.0M	1263 Lx	575 cm
5.0M	806 Lx	719 cm
Height	E Max.	Diameter

22.

LED Track Spot Light

Energy-Efficient, Up to 2800 lumens using just 30W 軌道燈



Type: GL-TS30 / GL-TS30DA (Dimming function)

Energy Used : 30W

Rated Life : 30,000 Hours

Input Voltage : 100-240V AC

CCT (color): 3000K / 4000K / 5000K

Luminous Flux : 2600 lm / 2750 lm / 2800 lm

System Efficacy: 87 lm/W / 92 lm/W / 93 lm/W

CRI (Minimum): 80

Beam Angle: 20° / 38°

Dimension: Type A: 235 x 210 x 95 mm (Track)

Type B: Ø 132 x 252 mm (Surface mount)

Type C: Ø 132 x 526 mm (Pendant rod)

Net Weight: 1.25 kg (with driver)

CE FC LM79

LED Wall-mounted luminaires

For parks, verandas, walls and roof edges 戶外壁掛式燈



CE FC IP65



(PIR sensor)

CE FC IP64

Type: GL-WL1012P

Energy Used : 11.5W

Rated Life : 30,000 Hours

Input Voltage : 100-240V AC

CCT (color): 3000K / 4000K / 5700K

Luminous Flux : 580 lm / 630 lm / 630 lm

System Efficacy: 50 lm/W / 55 lm/W / 55 lm/W

CRI (Minimum): 80

Beam Angle: 105°

Dimension: Φ 252 x 96 mm

IP Rating : IP65

Net Weight: 1.2 kg

**Type: GL-WL1012P-SL
GL-WL1012P-SH**

Energy Used : 12.5W

Rated Life : 30,000 Hours

Input Voltage : 100-120V AC (WL1012P-SL)
200-240V AC (WL1012P-SH)

CCT (color): 3000K / 4000K / 5700K

Luminous Flux : 580 lm / 630 lm / 630 lm

System Efficacy: 50 lm/W / 55 lm/W / 55 lm/W

CRI (Minimum): 80

Beam Angle: 105°

Dimension: Φ 252 x 105 mm

IP Rating : IP54

Net Weight: 1.25 kg



GlacialPower LED Driver Inside.

LED Down Light

4 to 10 inches full range of recessed and surface mounted

直下式筒燈

Recessed 嵌入式

GL-DL04 /GL-DL06 /GL-DL08 /GL-DL10
(IP64 Type): GL-DL06-IP /GL-DL08-IP



Surface Mounted 明裝式

GL-DL06-SM /GL-DL08-SM /GL-DL10-SM

CoB LED Down Light (Recessed) CoB 嵌入式

GL-DLC06-15 / GL-DLC06DA-15
GL-DLC06-35 / GL-DLC06DA-35

CE FC



GlacialPower LED Driver Inside.



CE FC LM79 IP40

■ GL-DLC06 series

6" recessed CoB down light.

Comes in 15W(1600lm-1720lm) and 35W(3500lm-3800lm) versions.

Dimming option available.(DA Type) (0-10V/PWM/Resistor)

100+Lumen/W lighting performance.

New DC power plug design simplifies installation.

Cold forged heatsink is small yet achieves strong thermal performance.

6吋CoB嵌入式筒燈。

提供15W(1600-1720流明)和35W(3500-3800流明)版本。

三合一調光版本可選。(DA型號) (0-10V/PWM/Resistor)

高達每瓦流明100以上。

新型直流電源接頭方便安裝。

採用冷鍛散熱設計提升效能。

Type/ 型號	GL-DLC06-15 GL-DLC06DA-15	GL-DLC06-35 GL-DLC06DA-35
Energy Used/ 耗電量	15W	35W
Rated Life/ 額定壽命	30,000 Hours	
Input Voltage/ 輸入電壓	100-240V AC	100-240V AC
CCT (color)/ 色溫	3000 / 4000 / 5000K	3000 / 4000 / 5000K
Luminous Flux / 光通量	1600 / 1700 / 1720 lm	3500 / 3700 / 3800 lm
System Efficacy/ 系統效能	107 / 113 / 115 lm/W	100 / 106 / 109 lm/W
CRI (Minimum)/ 顯色指數	80	
Beam Angle/ 光束角	90° (Reflector)	
Dimension/ 尺寸	Ø 175 x 100mm	
IP Rating/ IP防護等級	IP40	
Operation Temperature/ 工作溫度	-20°C ~ +40°C	
Net Weight/ 淨重	850 g (with driver)	1050 g (with driver)
Fixture Hole/ 挖洞尺寸	Ø 140~150 mm	

DLC06-35/ 3000K

1.0M	2388 Lx	198 cm
2.0M	536 Lx	396 cm
3.0M	228 Lx	594 cm
4.0M	126 Lx	793 cm
5.0M	79 Lx	991 cm
Height	E Max.	Diameter

DLC06-35/ 4000K

1.0M	2544 Lx	198 cm
2.0M	566 Lx	396 cm
3.0M	242 Lx	594 cm
4.0M	133 Lx	793 cm
5.0M	85 Lx	991 cm
Height	E Max.	Diameter

DLC06-35/ 5000K

1.0M	2609 Lx	200 cm
2.0M	584 Lx	400 cm
3.0M	248 Lx	600 cm
4.0M	138 Lx	800 cm
5.0M	87 Lx	1000 cm
Height	E Max.	Diameter



■ GL-DL04 series

Non-dimmable, AC-TRIAC dimmable and 3-in-1 dimmable options.
Directly compatible with 12V and 24V solar panels.(DC Input)

無調光、AC-TRIAC調光以及3-in-1調光(1-10V/PWM/Resistor)可選。
相兼容於 12V 和 24V 太陽能電池板。(DC Input)

CE FC IP40

Type/ 型號	GL-DL04	GL-DL04DA	GL-DL04DL GL-DL04DH	GL-DL04LD
Energy Used/ 耗電量	7.5W			
Rated Life/ 額定壽命	30,000 Hours			
Input Voltage/ 輸入電壓	100-240V AC	100-240V AC	100-120V AC(DL) 200-240V AC(DH)	11-15V DC 22-30V DC
CCT (color)/ 色溫	3000 / 4000 / 6000K			
Luminous Flux/ 光通量	530 / 550 / 580 lm			
System Efficacy/ 系統效能	71 / 73 / 77 lm/W			
CRI (Minimum)/ 顯色指數	80			
Beam Angle/ 光束角	110°			
Dimension/ 尺寸	Ø 114 x 13 mm			
Fixture Hole/ 挖洞尺寸	Ø 100 mm			



■ GL-DL06 series

Non-dimmable, AC-TRIAC dimmable and 3-in-1 dimmable options.
Directly compatible with 12V and 24V solar panels.(DC Input)

無調光、AC-TRIAC調光以及3-in-1調光(1-10V/PWM/Resistor)可選。
相兼容於 12V 和 24V 太陽能電池板。(DC Input)

CE FC IP50

Type/ 型號	GL-DL06	GL-DL06DA	GL-DL06DL GL-DL06DH	GL-DL06LD
Energy Used/ 耗電量	10.9W	10.9W	10.9W	10.5W
Rated Life/ 額定壽命	30,000 Hours			
Input Voltage/ 輸入電壓	* 100-240V AC	100-240V AC	100-120V AC(DL) 200-240V AC(DH)	11-15V DC 22-30V DC
CCT (color)/ 色溫	3000 / 4000 / 6000K			3000 / 4000 / 6000K
Luminous Flux/ 光通量	900 / 920 / 980 lm			900 / 920 / 980 lm
System Efficacy/ 系統效能	83 / 84 / 90 lm/W			86 / 88 / 93 lm/W
CRI (Minimum)/ 顯色指數	80			
Beam Angle/ 光束角	110°			
Dimension/ 尺寸	Ø 180 x 13 mm			
Fixture Hole/ 挖洞尺寸	Ø 165 mm			

* (Driver with CUL Certificate Support 277V AC for North America only)



6"

■ GL-DL06-IP series

For indoor or sheltered outdoor ceiling lighting applications.
Non-dimmable, AC-TRIAC dimmable and 3-in-1 dimmable options.
Directly compatible with 12V and 24V solar panels.(DC Input)

提供室內或有遮蔽的戶外天花板照明應用。

無調光、AC-TRIAC調光以及3-in-1調光(1-10V/PWM/Resistor)可選。

相兼容於 12V 和 24V 太陽能電池板。(DC Input)

CE FC IP54

Type/ 型號	GL-DL06-IP	GL-DL06DA-IP	GL-DL06DL-IP GL-DL06DH-IP	GL-DL06LD-IP
Energy Used/ 耗电量	10.8W	10.8W	10.8W	10.5W
Rated Life/ 额定寿命	30,000 Hours			
Input Voltage/ 输入电压	* 100-240V AC	100-240V AC	100-120V AC(DL) 200-240V AC(DH)	11-15V DC 22-30V DC
CCT (color)/ 颜色	3000	/ 4000	/ 6000K	3000 / 4000 / 6000K
Luminous Flux / 光通量	800	/ 820	/ 890 lm	800 / 820 / 890 lm
System Efficacy/ 系统效能	74	/ 76	/ 82 lm/W	76 / 78 / 85 lm/W
CRI (Minimum)/ 显色指数	80			
Beam Angle/ 光束角	110°			
Dimension/ 尺寸	Ø 161 x 20 mm			
Fixture Hole/ 挖洞尺寸	Ø 152 mm			

*(Driver with CUL Certificate Support 277V AC for North America only)



6"

■ GL-DL06-SM series

Can be mounted on nearly any surface: wall or ceiling.
Non-dimmable, AC-TRIAC dimmable and 3-in-1 dimmable options.
Directly compatible with 12V and 24V solar panels.(DC Input)

幾乎可以安裝在任何材質表面的天花板或牆壁。

無調光、AC-TRIAC調光以及3-in-1調光(1-10V/PWM/Resistor)可選。

相兼容於 12V 和 24V 太陽能電池板。(DC Input)

CE FC IP40

Type/ 型號	GL-DL06-SM	GL-DL06DA-SM	GL-DL06DL-SM GL-DL06DH-SM	GL-DL06LD-SM
Energy Used/ 耗电量	10.9W	10.9W	10.9W	10.5W
Rated Life/ 额定寿命	30,000 Hours			
Input Voltage/ 输入电压	* 100-240V AC	100-240V AC	100-120V AC(DL) 200-240V AC(DH)	11-15V DC 22-30V DC
CCT (color)/ 颜色	3000	/ 4000	/ 6000K	3000 / 4000 / 6000K
Luminous Flux / 光通量	900	/ 920	/ 980 lm	900 / 920 / 980 lm
System Efficacy/ 系统效能	83	/ 84	/ 90 lm/W	86 / 88 / 93 lm/W
CRI (Minimum)/ 显色指数	80			
Beam Angle/ 光束角	110°			
Dimension/ 尺寸	Ø 180 x 40 mm			

*(Driver with CUL Certificate Support 277V AC for North America only)



■ GL-DL08 series

Non-dimmable and 3-in-1 dimmable options.
Directly compatible with 12V and 24V solar panels.(DC Input)

無調光及3-in-1調光(1-10V/PWM/Resistor)可選。
相兼容於 12V 和 24V 太陽能電池板。(DC Input)

CE FC IP40

Type/ 型號	GL-DL08	GL-DL08DA	GL-DL08LD
Energy Used/ 耗電量	17.3W	17.3W	16.5W
Rated Life/ 額定壽命	30,000 Hours		
Input Voltage/ 輸入電壓	* 100-240V AC	100-240V AC	11-15V DC 22-30V DC
CCT (color)/ 色溫	3000 / 4000 / 6000K		
Luminous Flux/ 光通量	1430 / 1460 / 1600 lm		
System Efficacy/ 系統效能	83 / 84 / 92 lm/W		
CRI (Minimum)/ 顯色指數	80		
Beam Angle/ 光束角	110°		
Dimension/ 尺寸	Ø 240 x 13 mm		
Fixture Hole/ 挖洞尺寸	Ø 225 mm		

* (Driver with CUL Certificate Support 277V AC for North America only)



■ GL-DL08-IP series

For indoor or sheltered outdoor ceiling lighting applications.
Non-dimmable and 3-in-1 dimmable options.
Directly compatible with 12V and 24V solar panels.(DC Input)

提供室內或有遮蔽的戶外天花板照明應用。
無調光及3-in-1調光(1-10V/PWM/Resistor)可選。
相兼容於 12V 和 24V 太陽能電池板。(DC Input)

CE FC IP64

Type/ 型號	GL-DL08-IP	GL-DL08DA-IP	GL-DL08LD-IP
Energy Used/ 耗電量	17.2W	17.2W	16.4W
Rated Life/ 額定壽命	30,000 Hours		
Input Voltage/ 輸入電壓	* 100-240V AC	100-240V AC	11-15V DC 22-30V DC
CCT (color)/ 色溫	3000 / 4000 / 6000K		
Luminous Flux/ 光通量	1350 / 1400 / 1480 lm		
System Efficacy/ 系統效能	78 / 81 / 86 lm/W		
CRI (Minimum)/ 顯色指數	80		
Beam Angle/ 光束角	110°		
Dimension/ 尺寸	Ø 208 x 20 mm		
Fixture Hole/ 挖洞尺寸	Ø 200 mm		

* (Driver with CUL Certificate Support 277V AC for North America only)



■ GL-DL08-SM series

Can be mounted on nearly any surface: wall or ceiling.
Non-dimmable and 3-in-1 dimmable options.
Directly compatible with 12V and 24V solar panels.(DC Input)

幾乎可以安裝在任何材質表面的天花板或牆壁。
無調光及3-in-1調光(1-10V/PWM/Resistor)可選。
相兼容於 12V 和 24V 太陽能電池板。(DC Input)

CE FC IP40

Type/ 型號	GL-DL08-SM	GL-DL08DA-SM	GL-DL08LD-SM
Energy Used/ 耗電量	17.3W	17.3W	16.5W
Rated Life/ 額定壽命	30,000 Hours		
Input Voltage/ 輸入電壓	* 100-240V AC	100-240V AC	11-15V DC 22-30V DC
CCT (color)/ 色溫	3000 / 4000 / 6000K		3000 / 4000 / 6000K
Luminous Flux / 光通量	1430 / 1460 / 1600 lm		1430 / 1460 / 1600 lm
System Efficacy/ 系統效能	83 / 84 / 92 lm/W		87 / 88 / 97 lm/W
CRI (Minimum)/ 顯色指數	80		
Beam Angle/ 光束角	110°		
Dimension/ 尺寸	Ø 240 x 40 mm		

* (Driver with CUL Certificate Support 277V AC for North America only)



■ GL-DL10 / GL-DL10-SM series

Non-dimmable and 3-in-1 dimmable options.
Can be mounted on nearly any surface: wall or ceiling.(SM Type)

無調光及3-in-1調光(1-10V/PWM/Resistor)可選。
幾乎可以安裝在任何材質表面的天花板或牆壁。(SM型號)

CE FC

Type/ 型號	GL-DL10	GL-DL10DA	GL-DL10-SM
Energy Used/ 耗電量	24W	25.5W	24W
Rated Life/ 額定壽命	30,000 Hours		
Input Voltage/ 輸入電壓	* 100-240V AC		
CCT (color)/ 色溫	3000 / 4000 / 6000K	3000 / 4000 / 6000K	3000 / 4000 / 6000K
Luminous Flux / 光通量	2080 / 2200 / 2300 lm	2080 / 2200 / 2300 lm	2080 / 2200 / 2300 lm
System Efficacy/ 系統效能	87 / 92 / 96 lm/W	82 / 86 / 90 lm/W	87 / 92 / 96 lm/W
CRI (Minimum)/ 顯色指數	80		
Beam Angle/ 光束角	110°		
Dimension/ 尺寸	Ø 300 x 13 mm		Ø 300 x 40 mm
Fixture Hole/ 挖洞尺寸	Ø 285 mm		—

* (Driver with CUL Certificate Support 277V AC for North America only)



website



facebook

GlacialTech®

洋鑫科技股份有限公司 **GlacialTech Inc.**

地址：新北市中和區235中山路二段352號7樓
7F, No. 352, Sec. 2, Zhongshan Rd., Zhonghe Dist.,
New Taipei City, Taiwan, 235

Tel : +886 2 2244-1227 Fax : +886 2 2244-1228

Email : sales@GlacialTech.com Website : www.GlacialTech.com

