

REV	DESCRIPTION	APPROVED	DATE
A	NEW		2016/03/22

D

C

B




A

D

C

B

A

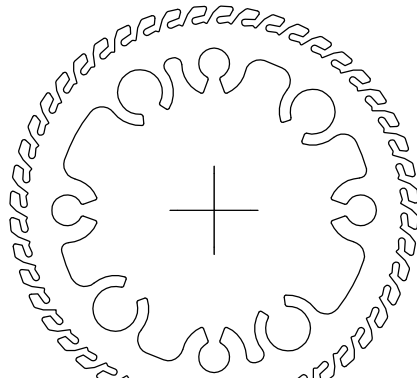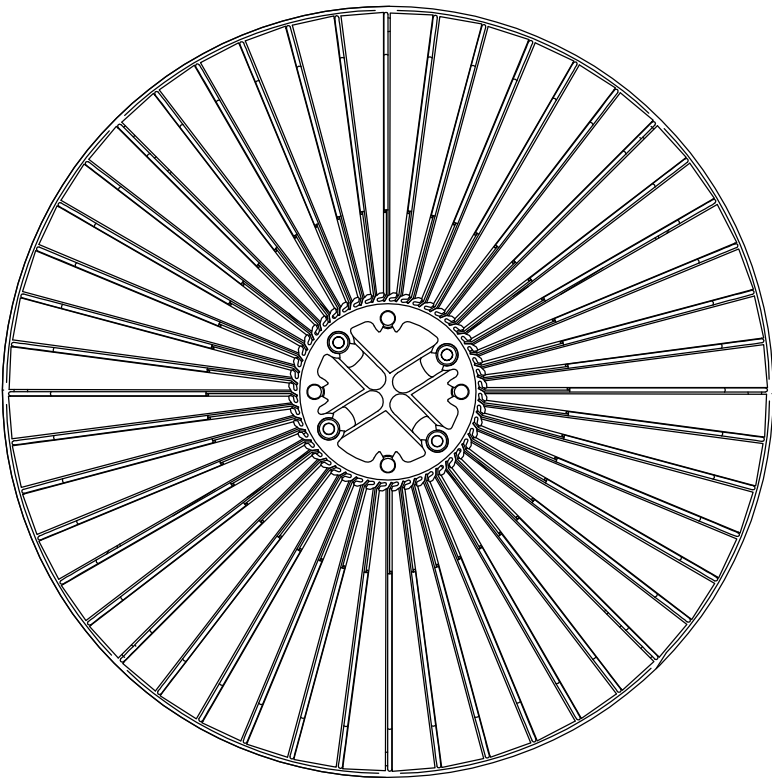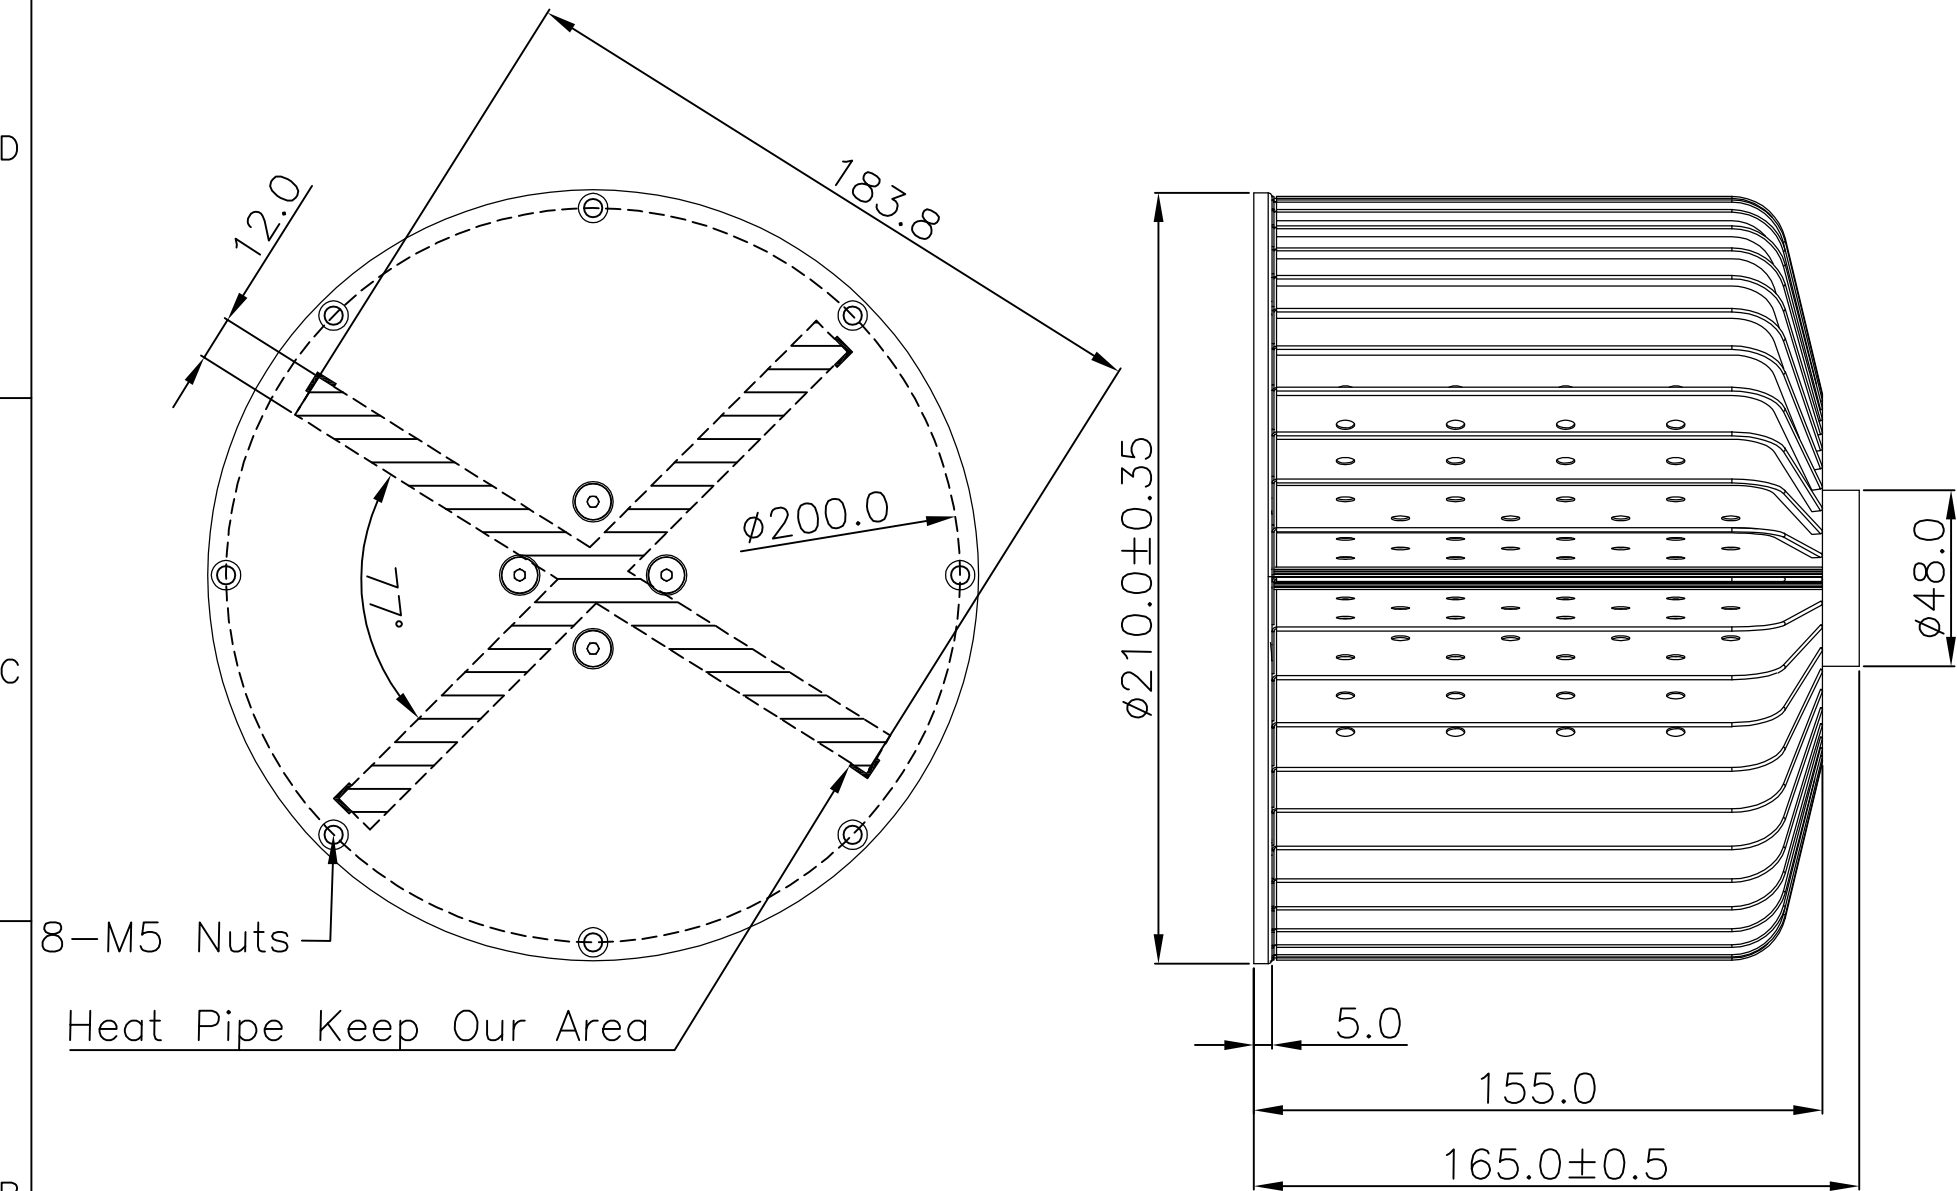

新製程鋁柱

- NOTE:
1. 鳍片铆皆使用新製程(參照右方鋁擠圖面)
 2. 表面處理：
CT-SRB5HP00LB0001：鋁材陽極本色(亮面)、螺絲鍍鋅，拉髮線#150、熱管抗氧化
 3. 表面不可有毛邊、刮傷、髒污、異色、液膠之現象
 4. 鳍片與底板接觸面需上導熱膠(310-01GHF)，铆合後不可有晃動現象
 5. 鳍片不可有明顯歪斜、變型、脫膠之現象
 6. 所有物件材質、表面處理、導熱膠皆需符合ROHS標準
 7. 鳍片與鋁柱需铆合，單片抗拉強度需大於15kg以

MATERIAL: AL1050+AL6063+HEAT PIPE				Finish ANODE			
DIM.	TOL.	Matel	Plastic	USER	PART NO. AT-SRB5HP00LB0001		
0 ~ 6	0.10	0.10			UNIT:mm	SCALE: 1/1	TITLE: GL-PROJECT
6 ~ 30	0.15	0.15			DRAWN: Ryan 2016/03/22		Igloo SR250HP
30 ~ 120	0.20	0.25			CHECKED:		DWG NO. RD05-42 A
120 ~ 300	0.25	0.40			APPROVED:		SIZE: A4
300 ~ 600	0.40	0.60					SHEET 1 OF 1
600 ~ 1200	0.70	0.80					
MATERIAL	1"			