

## Model: GP-CVP060N-xxV-P02 series (40~60W)

### ■ Features

- Universal AC Input Range 90 ~ 264VAC.
- Class II Power Design without Earth Pin.
- Constant Voltage Design. (CV mode)
- Fully Isolated Plastic Case.
- Protections: OCP/SCP/OVP.
- No Load Consumption < 0.5W at 230VAC.

### ■ Approvals

CE FC ENEC SELV

IP67 

### ■ Size

163 x 44.2 x 32.5 mm (L x W x H)




### ■ Specifications


Model No.		GP-CVP060N-05V-P02	GP-CVP060N-12V-P02	GP-CVP060N-24V-P02
Output	DC Voltage Range	5V	12V	24V
	Rated Current	0-8A	0-5A	0-2.5A
	Rated Max. Power	40W	60W	60W
	Voltage Tolerance	± 5%	± 5%	± 5%
	Ripple & Noise (Max.) <sup>note2</sup>	80 mVp-p	120 mVp-p	150 mVp-p
	Efficiency (Min)	76% at 230VAC full load	85% at 230VAC full load	86% at 230VAC full load
	Set up Time (Max)	< 1S / 115VAC at full load / < 0.5S / 230VAC at full load		
Input	Rated Voltage	100 - 240VAC 141~340VDC		
	Voltage Range	90-264VAC		
	Frequency Range	47 Hz ~ 63 Hz		
	AC Current (Max.)	1.1A at 115VAC / 0.5A at 230VAC for 40W	1.4A at 115VAC / 0.7A at 230VAC	
	Inrush Current (Max.)	30A at 115VAC / 65A at 230VAC for 40W	40A at 115VAC / 75A at 230VAC	
	Leakage Current	< 0.25mA / 240VAC		
	No Load Consumption	< 0.5W at 230VAC		
Protections	Over Current	110% - 150% Constant current limiting, auto-recovery		
	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed		
	Over Voltage	7-12V	14-19V	28-33V
		Protection type: Shut down o/p voltage, recovers automatically after voltage goes down.		
Environment	Operation Temp.	-10°C ~ 40°C (Refer to output load derating curve)		
	Operation Humidity	20% ~ 90% RH non-condensing.		
	Storage Temp & Humidity	-20 ~ +80°C ,10% ~ 90% RH		

Safety & EMC	Safety Standards	EN61347-1,EN61347-2-13;
	Withstand Voltage	I/P - O/P: 3.75K VAC
	Isolation Resistance	I/P - O/P: 100M ohms / 500VDC at 25°C
	EMI Conduction & radiation	meet Compliance to EN55015; FCC PART15 CLASSB
	EMS immunity	meet Compliance to EN61000-4-2,3,4,5,6,11;EN61547,EN61000-3-2 CLASS C
Connection	Input	UL rated, 18 AWG x 2 C ( 150 mm)
	Output	UL rated, 18 AWG x 2 C ( 150 mm)
Others	MTBF	100K hours min. @Ta=25 °C
	Dimension (L x W x H)	163 x 44.2 x 32.5mm; 380g/pcs
Note	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C ambient temperature. 2. Ripple & Noise are measured at 20MHZ bandwidth oscilloscope and with 0.1uF & 47uF parallel capacitor. 3. The power supply is considered a component which will be installed a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.	


■ **Mechanical Specification**

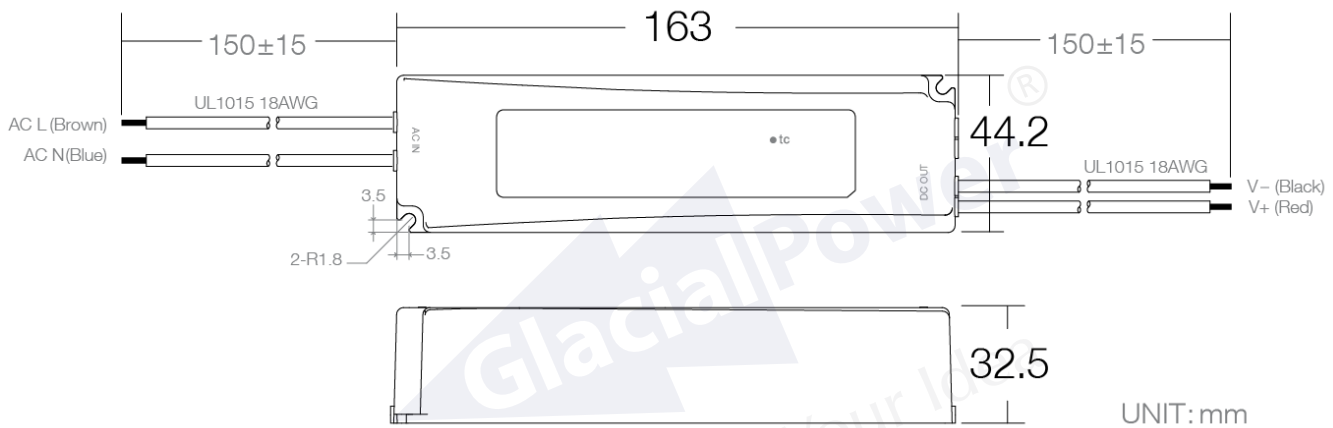

■ **Wiring Diagram**

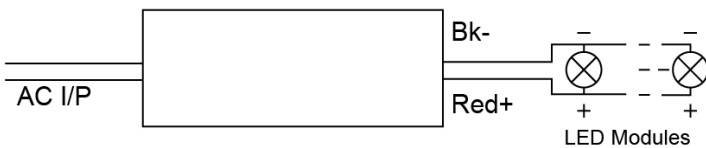

■ **Power Derating Curve**

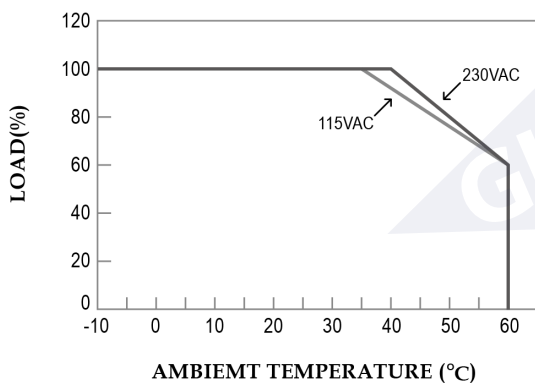

■ **Power Static Characteristics**

