

## Model: GP-CVP075N Series (75W/230V)

### 75W Constant Voltage LED Driver with Triac Dimming

#### Features

- AC phase-cut dimming
- Input Range from 205VAC to 256VAC.
- Constant Voltage design. (C.V mode)
- Work with leading edge and trailing edge TRIAC dimmers.
- Fully Potted suitable for dry and damp location applications.
- Protections: Over current / Short Circuit /Over Voltage/Over Temperature.
- IP65 Design For Indoor or Outdoor Installations.
- Appropriate for LED strips appliance.
- 2 Years Warranty.
- RoHS Compliant.

#### Approvals

**CE SELV IP65**



#### Size

138 x 47 x 32 mm (L x W x H)




#### Specifications

Model No.	GP-CVP075N-12VH-P02	GP-CVP075N-24VH-P02
Output	Voltage Range	12VDC
	Ripple & Noise (Max.) note.2	0.8Vp-p
	Voltage Tolerance	± 5%
	dimming Range	5%~100%
	Rated Current	5A
	Rated Power	60W
	Efficiency (Typ.) note.1	83%
	Set up Time (Max)	0.5S / 230VAC at full load
Input	Rated Voltage	220~240VAC
	Voltage Range	205~256VAC
	Frequency Range	50/60 Hz
	AC Current (Max.)	0.9A at 230VAC
	Power Factor	> 0.45 at 230Vac with full load.
	Inrush Current (Typ.)	Cold Start 60A at 230VAC
	Leakage Current (Typ.)	<1mA / 230VAC
Protections	Over Voltage	110 % - 130% Output voltage limiting, auto-recovery
	Over Current	120% - 150% Constant current limiting, auto-recovery
	Over Temperature	110°C - 125°C Temperature limiting, auto-recovery
	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed
Environment	Operation Temp.	-20°C ~ 50°C (Refer to output load derating curve)
	Operation Humidity	20% ~ 90% RH non-condensing.
	Storage Temp.	-20 ~ +80°C
	Storage Humidity	10% ~ 90% RH
Safety & EMC	Safety Standards	meet EN61347-1,EN61347-2-13
	Withstand Voltage	I/P - O/P : 3.75K VAC
	Isolation Resistance	I/P-O/P : 100M ohms / 500VDC at 25°C
	EMC Standards note.3	meet EN55015,EN61000-4-2,3,4,5,6,8,11 ,EN61547
Others	MTBF	100K hours min. @Ta=25°C
	Dimension (L x W x H)	138 x 47 x 32 mm; 355g/pcs

Note	<p>1. All parameters NOT specially mentioned are measured at 230V/50HZ AC input, rated load and 25°C ambient temperature.</p> <p>2. Ripple &amp; Noise are measured at 20MHZ bandwidth oscilloscope and with 0.1uf &amp; 47uf parallel capacitor at 100% duty output</p> <p>3. The power supply is considered a component which will be installed a final equipment.</p> <p>The final equipment must be re-confirmed that it still meets EMC directives.</p>
------	--


## Mechanical Specification

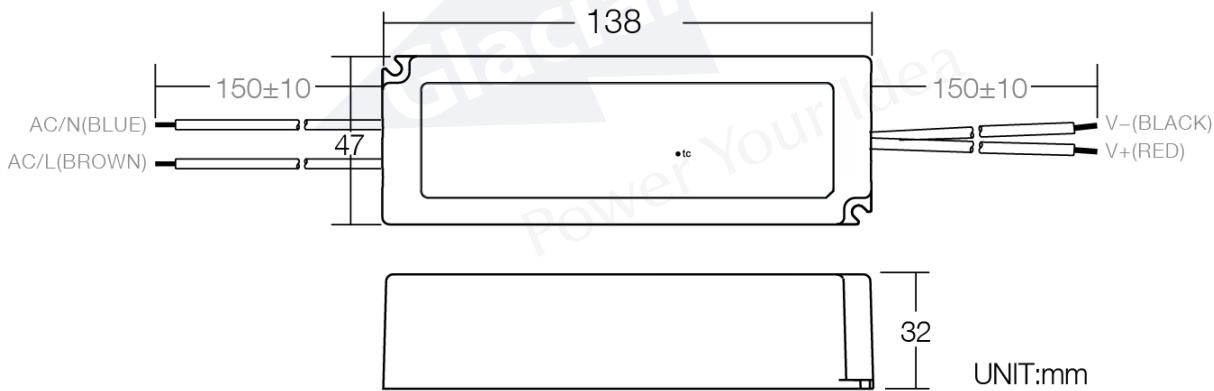


## Dimmer Recommended

Brand	Parts NO.
BERKER	286710
IMPORTE PAR TIBELEC	27222
JONYEI	JY-50182
Kopp	DIMMER 8085
LICHTREGLER	814
SCHNEIDER	EV51RD400
SHIHLIN	A5-21A1
SIEMTEC	V9-032

## Wiring Diagram

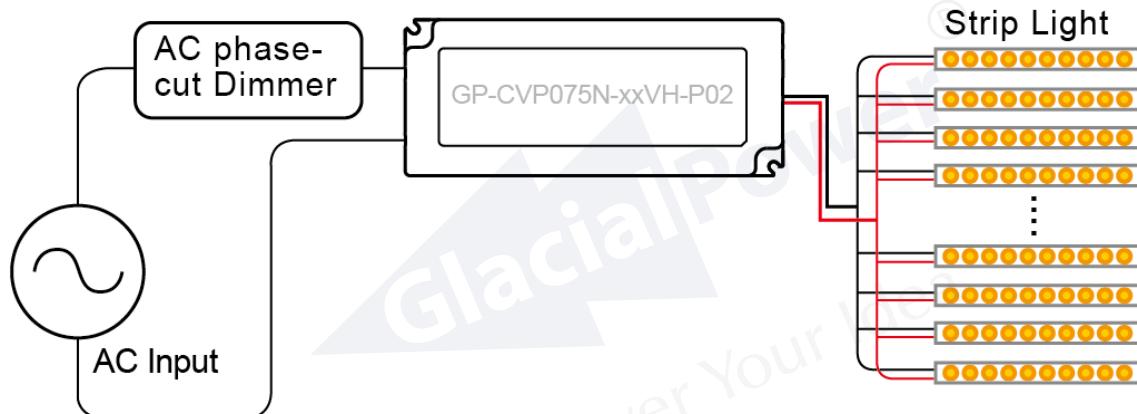

### Derating Curve

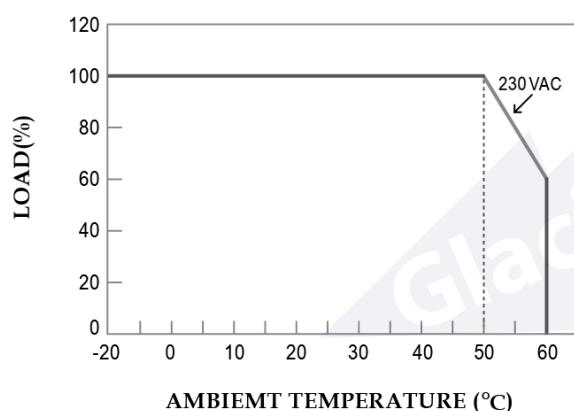

### Static Characteristics

