

## Model: GP-ES360P Series 360 Watts single output

### ■ Features

- 5V Use Patented Synchronous Rectification.
- Ball-Bearing Fan Speed Control by Thermal Detection.
- Built-in Constant Current Limiting Design.
- Active PFC with P.F.>0.95.
- Full Load Operation from -20°C ~50°C.
- High Efficiency up to 89%.
- Universal AC Input: 90~264VAC.
- Remote ON/OFF Control (Optional).
- Protections: Over Load/Over Voltage/Short Circuit/Over Temperature.

### ■ Approvals



### ■ Size

215 x 115 x 50 mm (L x W x H)





### ■ Specifications

Model No.		GP- ES360P-05	GP- ES360P-12	GP- ES360P-15	GP- ES360P-24	GP-ES360P-48
Output	DC Voltage	5V	12V	15V	24V	48V
	Rated Current	0-60A	0-30A	0-24A	0-15A	0-7.5A
	Rated Power	300W	360W	360W	360W	360W
	Ripple & Noise (Max.)	100mV	120mV	150mV	150mV	240mV
	Efficiency (Typ.)	81%	85%	85%	87%	89%
	Voltage Adjustment Range	4.5-5.5V	10-13V	13.5-17V	20-27V	41-52V
	Voltage Tolerance	± 2%	± 1%	± 1%	± 1%	± 1%
	Rise Time	<50ms at full load.				
	Set up time (Max.)	1000ms/230VAC, 2500ms/115VAC				
	Hold Time (Typ.)	>16ms at full load.				
Input	Voltage Range	90VAC ~ 264VAC or 127~370VDC.				
	Frequency Range	47 ~ 63 Hz.				
	Power Factor Correction	> 0.95/230VAC 0.98/115VAC.				
	AC Current	3A at 115VAC / 1.5A at 230VAC	5A at 115VAC / 2.5A at 230VAC			
	Inrush Current	20A at 115VAC/ 40A at 230VAC (COLD START).				
	Leakage Current	<1mA / 240VAC.				
Protections	Over Load	Over 105~135% output rating and by constant current mode. Recovers automatically after fault condition has been removed.				
	Over Temperature	Key part detect over 85°C ± 5°C and by shutdown output voltage, re-power on to restart.				
	Short Circuit	By constant current mode. Recovers automatically after fault condition has been removed.				
	Over Voltage	5.75-6.75V	14-16V	17.3-21V	29-33.6V	57-67V
		Shutdown output voltage, re-power on to restart.				
Function	Remote Control	CON2: 4~10VDC power OFF, 0~0.8VDC power ON.				
Environment	Operation Temp.	-20°C ~50°C full load, 50°C ~65°C (Refer to output load derating curve).				
	Operation Humidity	20% ~ 90% RH non-condensing.				
	Storage Temp.	-40 ~ +80°C.				
	Storage Humidity	10% ~ 90% RH.				
	Vibration	10~500 Hz, 2G 10 min./1 cycle, 60 min. each along X, Y, Z axes.				

Safety & EMC	Withstand Voltage	I/P - O/P: 3K VAC, I/P - FG: 1.5K VAC, O/P - FG: 0.5K VAC.
	Isolation Resistance	100M ohms / 500VDC at 25°C : I/P-O/P, I/P-FG, O/P-FG.
	EMI Conduction & Radiation	Compliance to EN55022 class B, CISPR22 class B.
	Harmonic Current	Compliance to EN61000-3-2, -3.
	EMS Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11 Light industry level, criteria A.
Others	MTBF	210K hour's min. MIL-HDBK-217F (25°C).
	Dimension(L x W x H)	215 x 115 x 50mm; 1050g/pcs
Note	1. All specifications measured at 230VAC and 25°C ambient. 2. Ripple & noise are measured at 20MHZ bandwidth oscilloscope and with 0.1uf & 47uf parallel capacitor. 3. The power supply is considered a component which will be installed into final equipment. The final equipment must be re-confirmed that it still meets EMC directives.	

## ■ Derating Curve

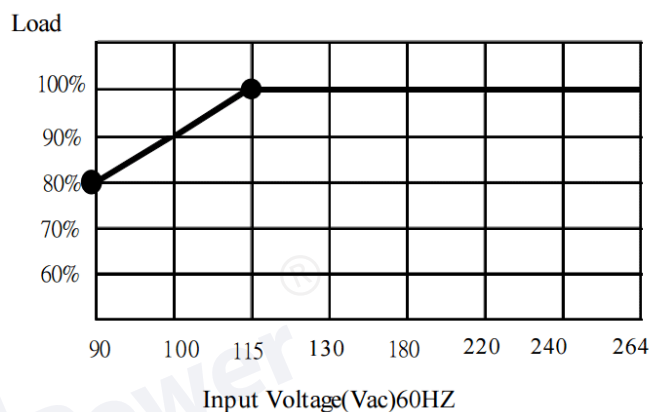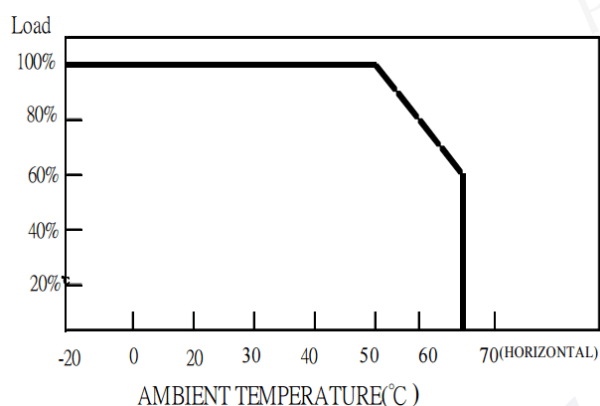

## ◆ Terminal Pin Number Assignment:

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4~6	DC OUTPUT -V
2	AC/N	7~9	DC OUTPUT +V
3	FG		

## ◆ Remote ON/OFF (CON2): JWT A2001H02-2P or Equivalent (optional)

Pin No.	Assignment	Mating Housing	Terminal
1	RC+	JWT A2001WR2-2P or Equivalent	JWT A2001TOP-2L or Equivalent
2	RC-		

## ■ Mechanical Specification

