



# GT JET 6038 Booster Fan



## Key Features:



- Integrated Stator Blade Frame: Optimizes airflow direction and corrects vortex patterns, significantly reducing turbulence and energy loss.
- Dual ball bearing construction: Engineered for high-temperature, high-speed, and long-duration reliability.
- The copper tube enhances heat dissipation and shaft stability, improving fan durability and cooling efficiency.
- Supports intelligent speed control (PWM) and fault feedback (option).

## Specifications:

| Model (TYPE A) | Rated Voltage (VDC) | Rated Current (A) | Power Consumption (Watts) | Speed (rpm) | Air Flow (CFM) | Static Pressure (mmH <sub>2</sub> O) | Noise (dBA) |
|----------------|---------------------|-------------------|---------------------------|-------------|----------------|--------------------------------------|-------------|
| GT-A06038B12M  | 12                  | 0.49              | 5.88                      | 10,000      | 43.12          | 30.91                                | 51.7        |
| GT-A06038B12H  | 12                  | 1.34              | 16.08                     | 14,000      | 64.25          | 62.03                                | 59.3        |

1. Material : Plastic PBT (UL : 94V-0) ;  
 2. Bearing Type : Two ball bearing  
 3. Protection : Auto-Restart  
 4. Operating Temperature : -20 ~ 70 °C

## Dimension:

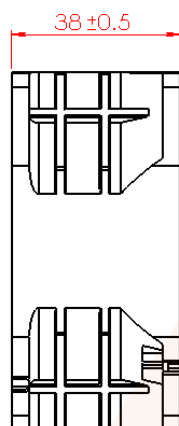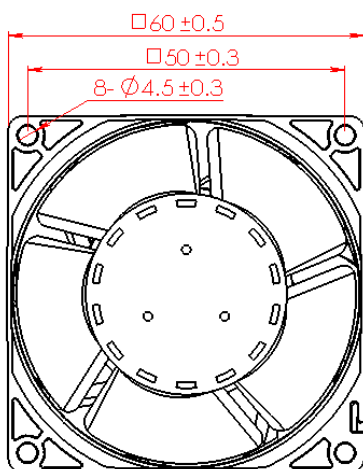

UNIT: mm

## P-Q Curve:

