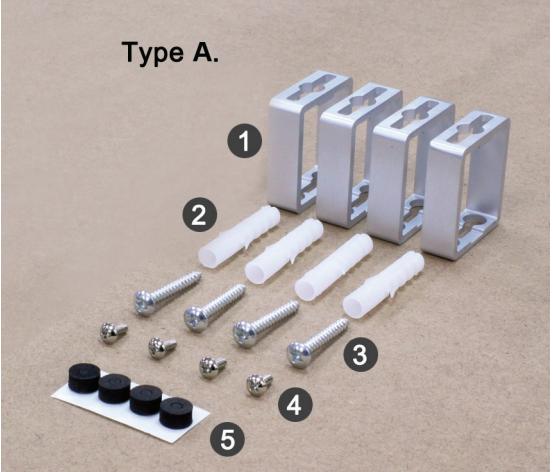
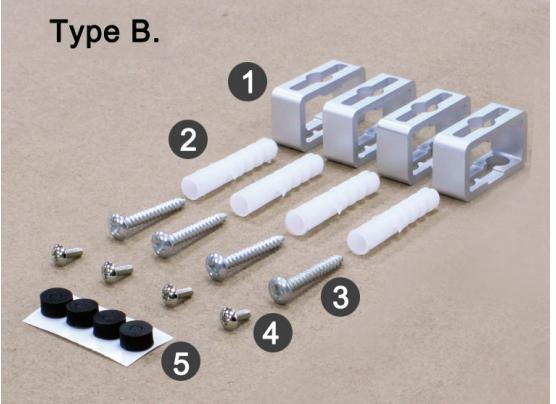
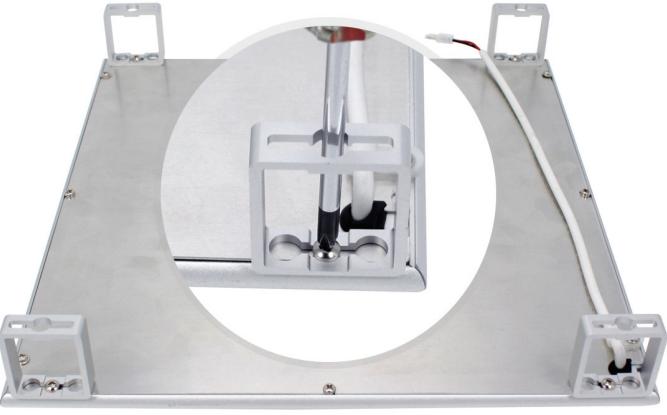
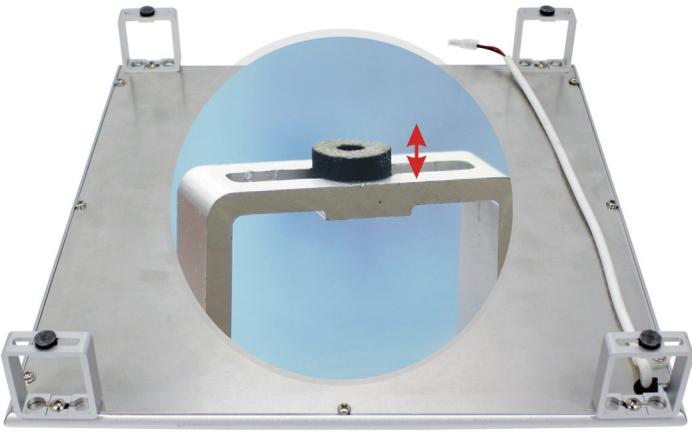
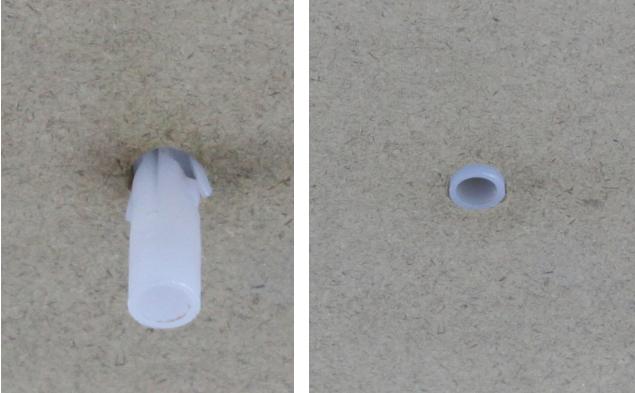



# Installation Instructions for Panel Light-V2 Ceiling Accessory

(安裝前請先詳細閱讀說明書)

Step	Photograph	Description
	<p>有 Type A 及 Type B 可選 Choose Type A (for concrete and wooden ceilings) or Type B installation kit (for wooden ceilings)</p> 	<p>Type A 配件(適用水泥及木質板) Type A installation kit (for concrete and wooden ceilings) (含 Drive 高度)</p> <p>(Note: the mounting stand is designed for a driver)</p> <p>① 支架/40mm x 4 pcs 4 x 40mm stands</p> <p>② 塑膠膨脹管 x 4 pcs 4 x Plastic expansion pipes</p> <p>③ M4*30 螺絲 x 4 pcs 4 x M4*30 screws</p> <p>④ M3*8 螺絲 x 4 pcs 4 x M3*8 screws</p> <p>⑤ 定位軟塞 x 6 pcs 6 x Soft plugs for positioning</p>
		<p>Type B 配件(適用木質板) Type B installation kit (for wooden ceilings) (吸頂不含 Drive 高度)</p> <p>(Note: The mounting stand is NOT designed to contain a driver.)</p> <p>① 支架/20mm x 4 pcs 4 x 20mm stands</p> <p>② 塑膠膨脹管 x 4 pcs 4 x Plastic expansion pipes</p> <p>③ M4*30 螺絲 x 4 pcs 4 x M4*30 screws</p> <p>④ M3*8 螺絲 x 4 pcs 4 x M3*8 screws</p> <p>⑤ 定位軟塞 x 6 pcs 6 x Soft plugs for positioning</p>

1.		<p>將 Panel Light-V2 背面向上平放，依序將圖上標示的 4 顆螺絲拆下          Place the panel light-V2 with the back facing up, and remove four screws depicted in the picture.</p>
		<p>將配件①置於步驟 1 卸下螺絲的位置 (Type A 及 Type B 相同步驟)          Place a stand (①) in the position of the unscrew in step 1.          (Same procedure for Type A and Type B installation kits.)          以配件④螺絲鎖緊          注意:對齊邊框(平行對齊)          Connect a stand with a M3*8 screw (Note: Align the stands parallel to panel light.)</p>
3.		<p>取出配件⑤定位軟塞，黏膠面朝上，由下往上推至凸出          Push the soft plugs(⑤) into the slots in the stands from the bottom with the sticker surface facing up.</p>

4.		<p>請將欲安裝的天花板區域清潔乾淨 Before mounting ensure the ceiling is clean. 將 Panel Light 置於天花板，確保配件①及配件⑤平整的貼在天花板上 Hang the panel light from the ceiling and ensure the stand (①) and the soft plug (⑤) touch the ceiling evenly. 注意:此動作需 2 人配合 (Note: Two people are needed to mount the panel light.)</p>
5.		<p>依序將四邊配件⑤往天花板(向上)壓緊；並確保配件⑤已黏住天花板後才可取下 Panel Light Make sure all of the four soft plugs (⑤) are attached on to the ceiling. 注意:此動作需 2 人配合 (Note: Two people are needed to mount the panel light.)</p>
6.		<p>請用 8mm 鑽頭，用電鑽向四個配件⑤中心鑽入約 5cm 深度。 Drill a 5cm deep hole with a 8mm drill through each of the soft plugs.</p>
7.		<p>將配件②放入鑽好的四個洞 Put a plastic expansion pipe (②) into each of the holes.</p>

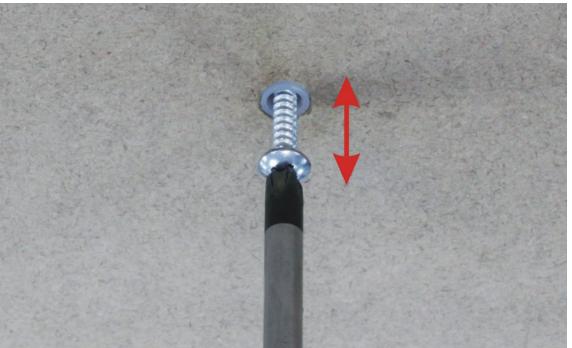15.		將配件③鎖入配件②內，保留配件③外露約 6mm，依序完成四個定位點 Screw a M4*30 screw into each of the plastic expansion pipes. (Note: Make sure each of the screws remain 6mm exposed.)
17.		將 Panel Light 四邊配件①的中心圓孔對準四顆螺絲，並向上穿入。 注意:需四邊同時 Attach the stands on the panel light to the screws on the ceiling. (Note: All four stands need to be pushed up at the same time.)
18.		貼住天花板後將 Panel Light 向左(或右)推動 To connect the panel light to the screws push the panel either to the left or right depending on preference. 注意:需四邊同時 確定四邊都卡住後即可放手 (Note: All four sides need to be pushed up at the same time.)
19.		完成後，配件將垂吊緊附於螺絲 The panel light is now securely mounted.