



ELECTRONICS TESTING CENTER, TAIWAN
EMC/Safety/Reliability Testing Laboratory
ADDRESS: NO.8 LANE 29, WENMING RD., LESHAN TSUEN,
GUISHAN SHIANG, TAOYUAN COUNTY 33383, TAIWAN
TEL:03-3280026 FAX:03-3276175
<http://www.etc.org.tw>



Page : 1 of 7 Pages
Issue Date : Jan. 12, 2012

TEST REPORT

Rep. No. : 11-12-VAA-102
Applicant : GlacialTech Inc.
Address : 9Fl., No.352, Sec.2, Jung Shan Rd., Jung He City,
Taipei, Taiwan, 235, R.O.C
Commodity : Class 2 LED Driver
Model : GP-HS25P-52
Quantity : 1 set
Date of Receipt : Dec. 21, 2011
Date of Testing : Jan. 09, 2012
Test specification : IEC60529 Edition 2:1989 + Amendment 1:1999
Ambient Environment : Temp. 18 °C, R.H. 69 %, A.P. 980 mbar
Test Item : IP67
Test condition & result : See the following sheets

General remarks :

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the
Issuing testing laboratory.

Approved by :


Vincent Lin

TEST REPORT

Rep. No. : 11-12-VAA-102

Page: 2 of 7 Pages

1. Test Item : IP67**2. Test Conditions :****2.1 Ambient Condition**

- Temperature range:15 °C to 35 °C.
- Relative humidity:25 % to 75 %.
- Air pressure:860 mbar to 1060 mbar.

2.2 IP6X (Refer to IEC60529 13.4 test)

- Dust:Talcum powder.
- The amount of dust:2 kg/m³.
- Maximum depression of 2kPa.(20mbar).
- The duration of the test is 8 hr.
(Extraction rate is less than 40 volumes per hour)


2.3 IPX7 (In accordance with IEC60529 14.1/14.2.7 test)

- Water depth:1000 mm above the specimen.
- The duration of the test is 30 min.
- The water temperature does not differ from that of the equipment by more than 5 K.

3. Test Result :

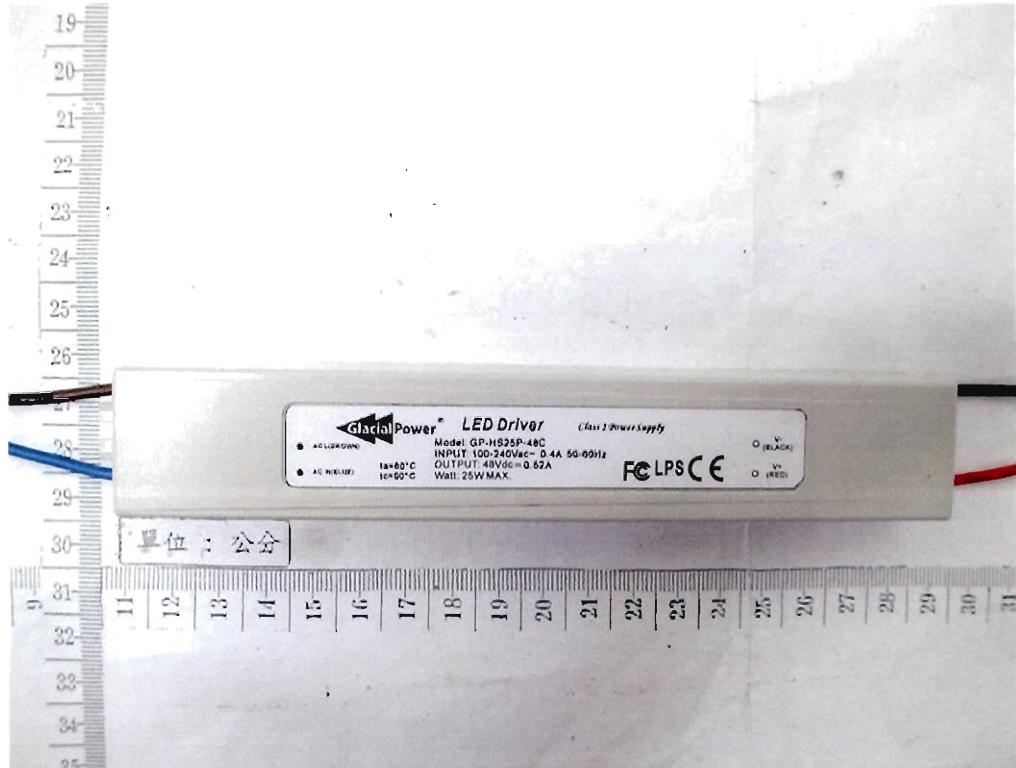
IP Code	Results	Acceptance Criteria
IP6X	There is no trace of dust inside.	IEC60529 13.6
IPX7	There is no trace of water inside.	IEC60529 14.3

Tested by :

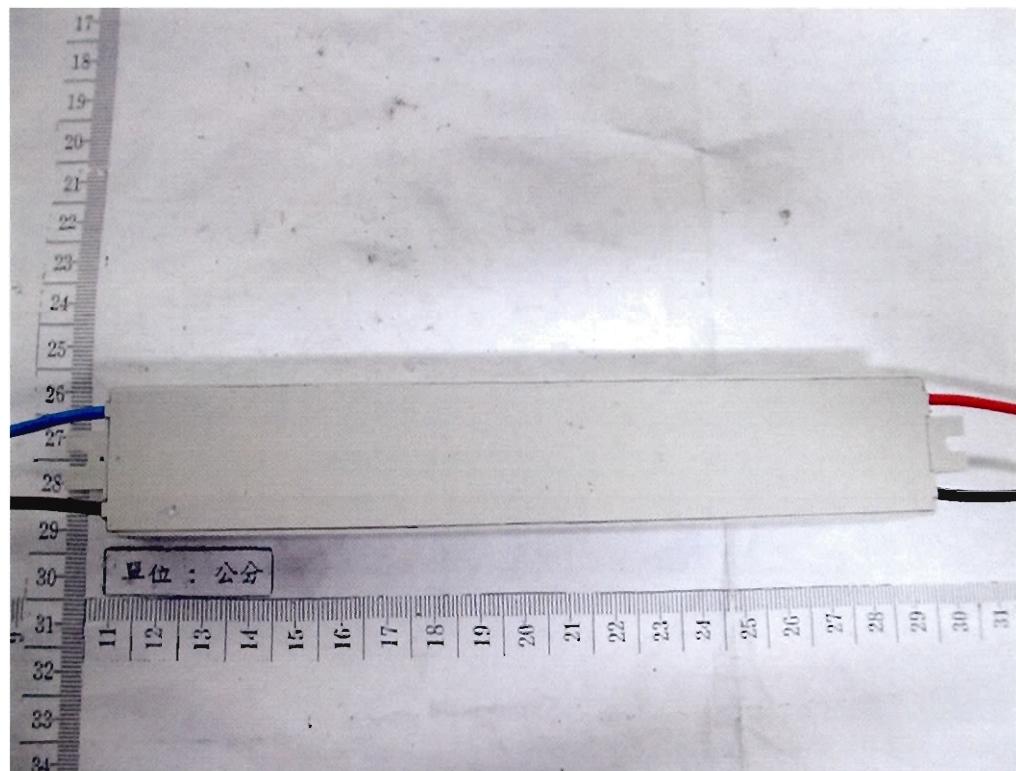

Mark Chen

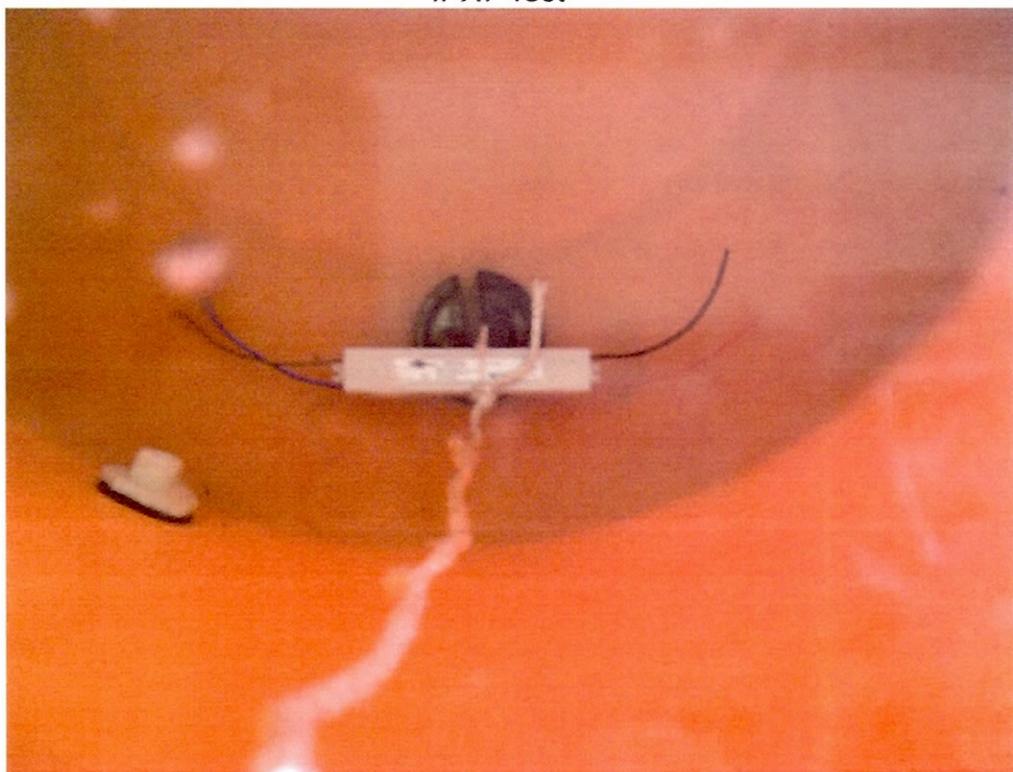
Utilized testing equipments 試驗設備列表

Test Mode 測試項目	Kind of Instrument 設備名稱	Manufacturer 製造商	Model Serial No. 型號,序號或其它資訊	Due Date 下次校驗日期
IP1X	Test sphere(50mm)試驗球	Fimko Lab.	IEC60529/Tab.6 A	2012/11/03
IP2X	Test sphere(12.5mm)試驗球	Fimko Lab.	IEC60529/Tab.6 B	2012/11/03
IP3X	Test rod,2.5mm(D)x100mm(L)試驗棒	Fimko Lab.	IEC60529/Tab.6 C	2012/11/03
IP4X	Test rod,1mm(D)x100mm(L) 試驗棒	Fimko Lab.	IEC60529/Tab.6 D	2012/11/03
✓ IP5~6X	TESTING T1-16 DUST TEST CHAMBER	TESTING	IEC60529/Figure.2	2012/05/04
IPX1~2	Drip Box 滴水試驗裝置	PTL	IEC60529/Figure.3	2012/10/23
IPX3~4	Oscillating Tube 灑水及濺水試驗裝置	ALAB	IEC60529/Figure.4	2012/08/14
IPX5~6	Hose Nozzle 對噴流保護檢測用試驗裝置	PTL	IEC60529/Figure.6	2012/10/23
✓ IPX7~8	Water Butt 水桶	達峯塑膠		N/A
	High-pot tester 耐壓機 (HP1)	Good will	GPT-515AD	2012/10/23
	Digital Insulation Tester 絝緣電阻計	Hioki	3119-11	2012/10/20
✓	Stop watch 馬錶	Casio	HS-3	2012/08/30
	Leakage Current Tester 滲漏電流表	Simpson	228	2012/10/18
	High-pot tester 耐壓機 (HP2)	EXTECH	7410	2012/10/30
✓	Digital Thermometer 數位式溫度計	Yokogawa	2455	2012/06/30

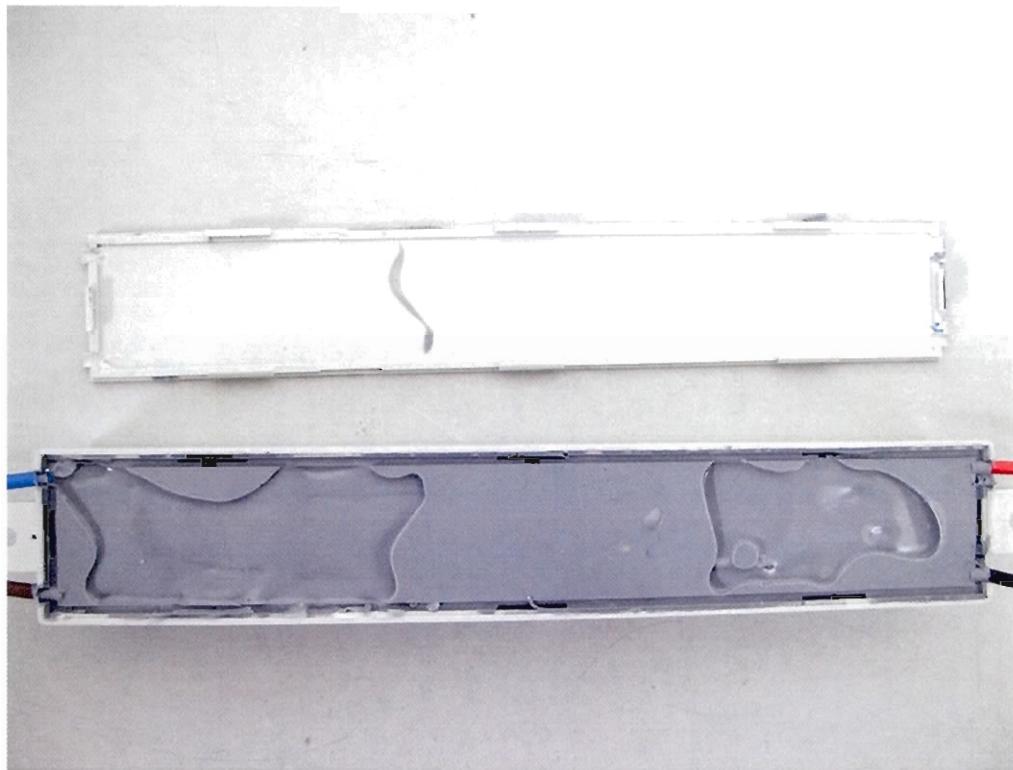
Model : GP-HS25P-52
*****

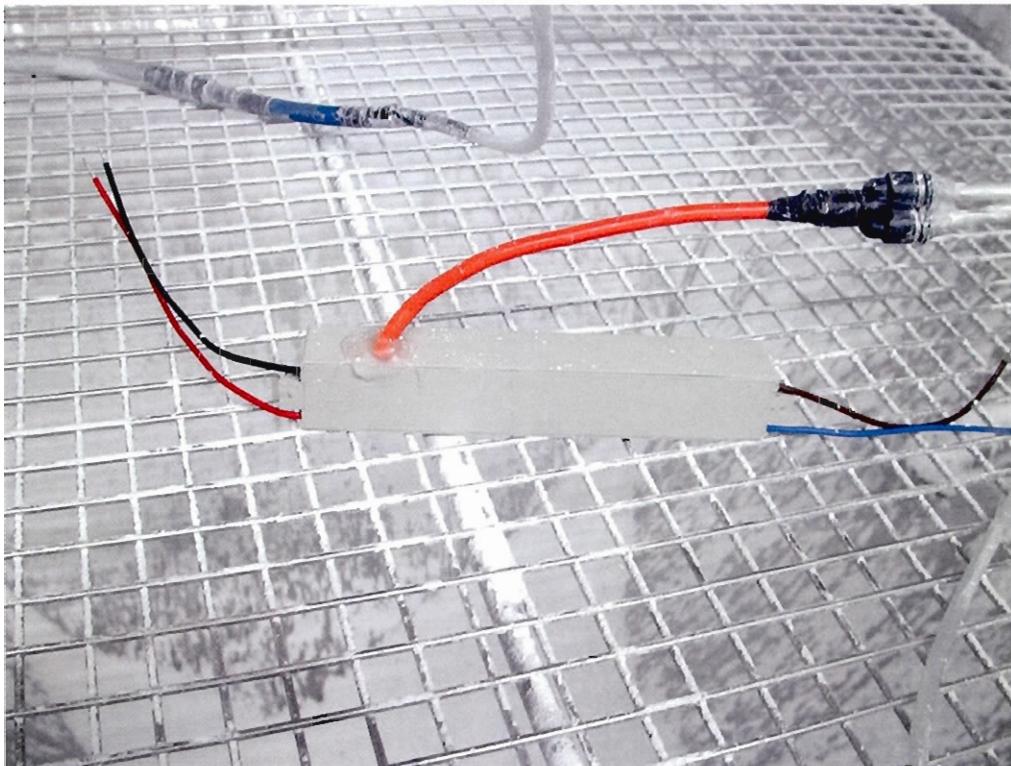
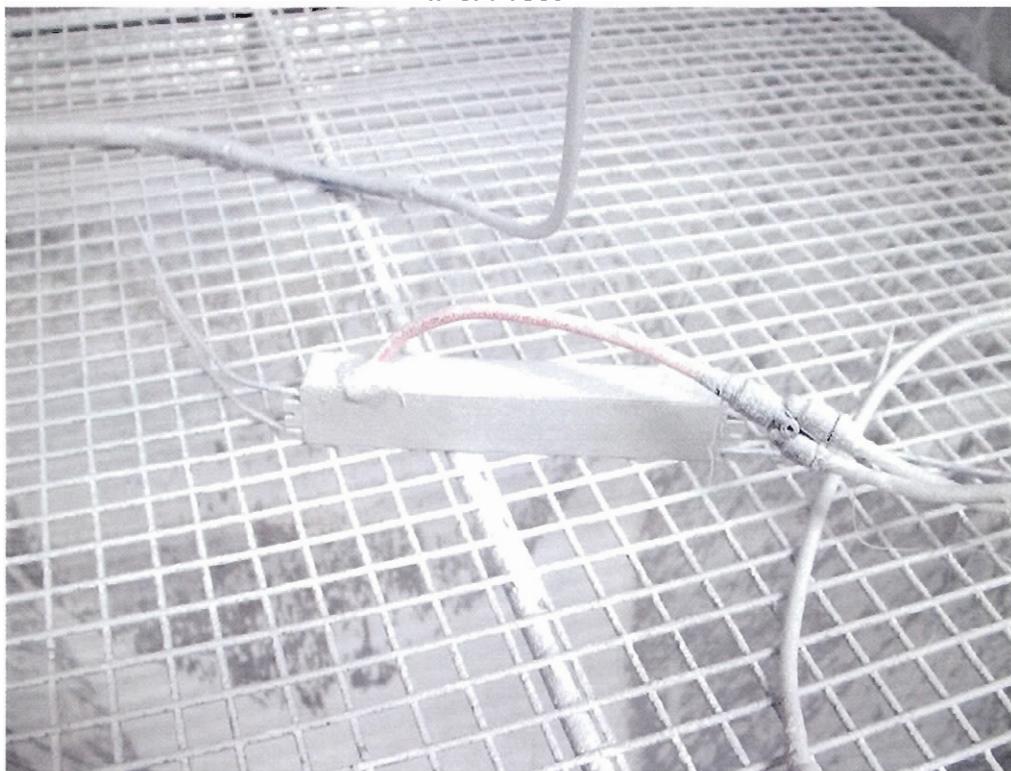
Model : GP-HS25P-52



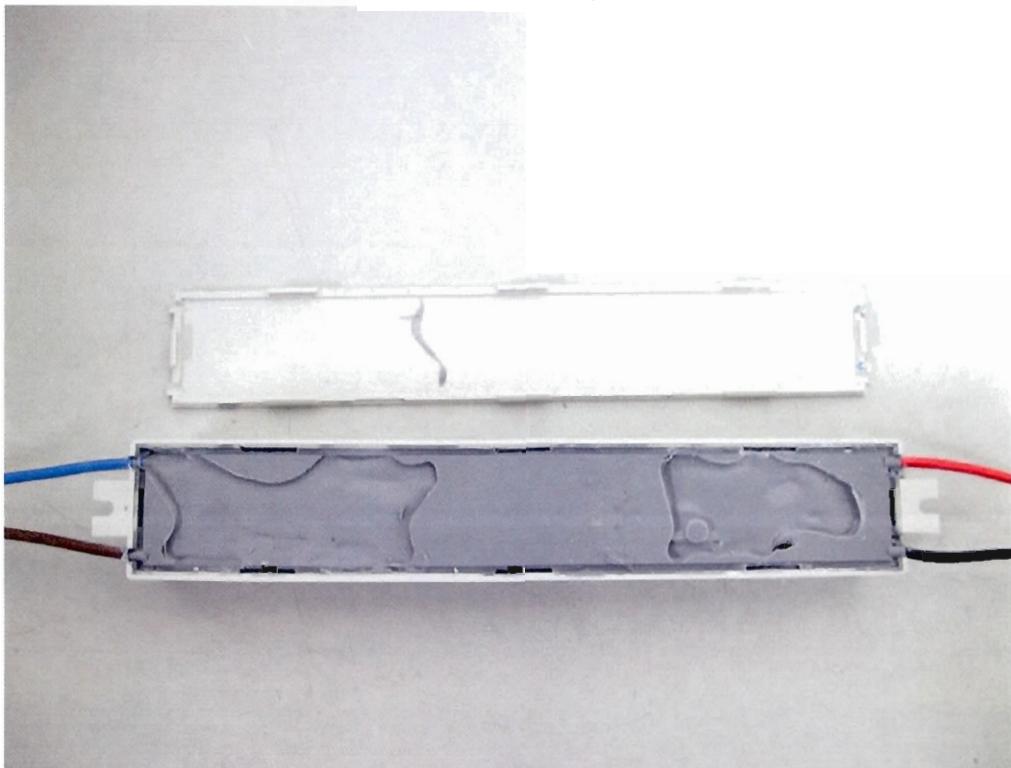
IPX7 Test

There is no trace of water inside.



IP6X Test**IP6X Test**

There is no trace of dust inside.



There is no trace of dust inside.

